



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature:CONN RF50 AD N(M) TO SMA (F)


Page No.

1 of 1

STK-571625531285

CONN RF50 AD N(M) TO SMA (F)

OUTLINE DRAWING

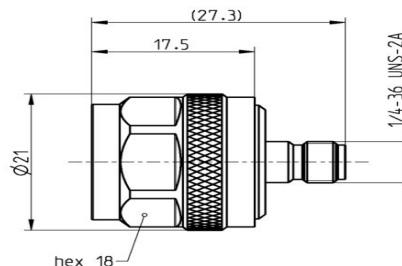

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	DC to 12 GHz
Return loss	≥ 25 dB, 5 to 12 GHz
Insertion loss	≥ 0.05 db
Insulation resistance	$\geq 5 \times 10^3$ M Ω
Center contact resistance	≥ 1 m Ω , N side ≤ 3 m Ω , SMA side
Outer contact resistance	≤ 0.25 m Ω , N side ≤ 2 m Ω , SMA side
RF-leakage	≥ 100 dB up to 1 GHz

ENVIRONMENTAL INFORMATION

Operation temperature	-55°C to +155°C
-----------------------	-----------------

MECHANICAL INFORMATION

Mating	500 Cycles
Coupling nut retention	≥ 450 N
Weight	27 g/pce
Torque	max. 1.7 Nm

MATERIAL INFORMATION

COMPONENTS		MATERIAL		PLATING			
Center contact		CuBe		gold			
Outer contact N side		Brass		Nickel			
Outer contact SMA side		CuBe or equiv.		gold			
Dielectric		PTFE		-			
Gasket		Silicone		-			
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-

Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of **Synergy Telecom P Ltd**- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from **Defense & Aerospace division**. This document and all its copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in