
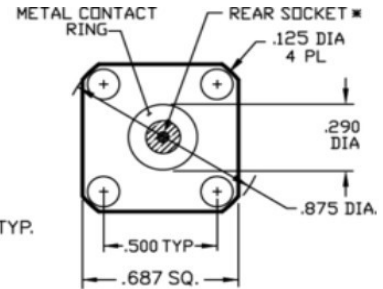


Nomenclature: CONN RF50 N JK 4H SQ PIN Φ-0.38 FL MT	Page No. 1 of 1
---	----------------------------

STK-571131601271	CONN RF50 N JK 4H SQ PIN Φ-0.38 FL MT
--------------------------------	--

OUTLINE DRAWING

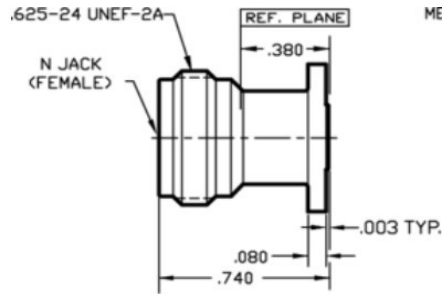

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω	
Frequency	18.0 GHz	
Low Low Leakage	-(120 – fGHz) dB Max	

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)	
Housing	Steel	Passivated	
Contact	Beryllium Copper	Gold Plated	
Dielectric	PTFE		
Center Contact	High Temperature		
Connector Interface	Per MIL-STD-348		

ENVIRONMENT INFORMATION

Temperature Range	-55° C to +165° C	
-------------------	-------------------	--

Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	01.11.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	
Email: sales.blr@rfconnector.in								

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from **Defence & Aerospace division**. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in