





RF indicators

Test item		Metric	Unit	Remarks
Frequency range		2400-2500	MHz	
Working voltage		32	V	
Mix Output Power		51.8	dBm	$\leq 11.3A$
Standard Input Power		5-10	dBm	
Working efficiency		50	%	Typical work efficiency
Output port standing wave ratio		≤ 1.50		No power on test
High and low temperature test	Working environment temperature (°C)	-40 ~ +55	°C	
	Power stability	1.5	dB	-20°C ~ +75°C
Power supply requirements		$\geq 14A$		Maximum Power Output
485 Monitoring		Support real-time temperature reporting, output power reporting, and working current reporting; Equipped with temperature protection, overcurrent protection, and standing wave protection. Support Alc power control		
Control Interface		2*4pin	Other pin: NC 3pin GND 8pin 485B 1pin 485A 5pin PA_EN (High on low off, with a delay of less than 2us)	



Power Supply Interface	through-hole	28v
Vibration Requirements		Meet the requirements of military vehicle mounted equipment
Output Connector	N	Female
Input Connector	SMA	Female
Size	154.5×73×26.5m m	Excluding interfaces N

Installation

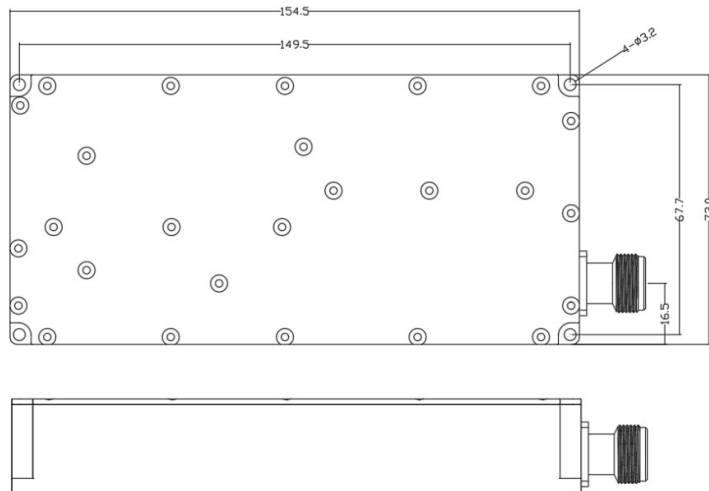

Dimensions

