



STK SERIES CONNECTOR



Nomenclature: STRAIGHT JACK


Page No.

1 of 1

STK--5711- F26-RF400-5306G-Y

STRAIGHT JACK

OUTLINE DRAWING

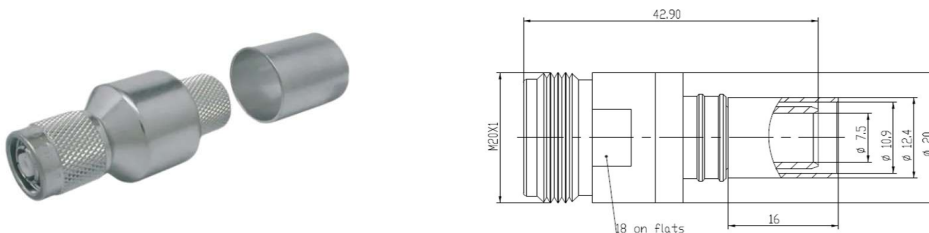

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency range	DC to 6 GHz
Proof voltage	2000
Insert loss	≤ 0.1
Outer conductor	≤ 0.5
Inner conduct	≤ 1.0
Insulation resistance	> 10000
VSWR	≤ 1.15

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
Inner conduct	SPRING BRONZE	Ag5
Outer conductor	Brass	Copper
Tube	copper	copper
Insulator	PTFE	copper

ENVIRONMENTAL INFORMATION

Temperature range	-40°C~+85°C
-------------------	-------------

MECHANICAL INFORMATION

Retention	$\geq 4N$
Mating cycles	500
Tensile force cable-connector	400N
Torsion cable connector	2N

Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	01.11.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in