



STK SERIES CONNECTOR




Nomenclature: STRAIGHT PLUG

Page No.
1 of 1

STK-5711- F26-RF400-5306N-Y

STRAIGHT PLUG

OUTLINE DRAWING

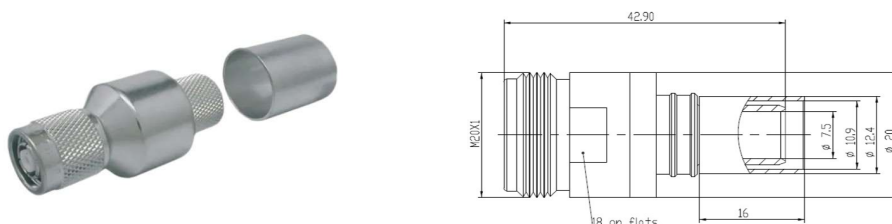

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency range	DC to 6 Ghz
Proof voltage	2000
Insert loss	≤ 0.1
Outer conductor	≤ 0.5
Inner conduct	≤ 1.0
Insulation resistance	> 5000
VSWR	≤ 1.3

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
Inner conduct	SPRING BRONZE	Ag5
Outer conductor	Brass	Copper
Tube	copper	copper
Insulator	PTFE	copper
Nut	Brass	
Insulator	PTFE	
Gasket	Silicone rubber	

ENVIRONMENTAL INFORMATION

Temperature range	-40°C~+85°C
-------------------	-------------

MECHANICAL INFORMATION

Nut torque	10-12N
Nut whorl pull	500N
Tensile force	400N
Torsion cable connector	2N

Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.11.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-



Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and all copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in