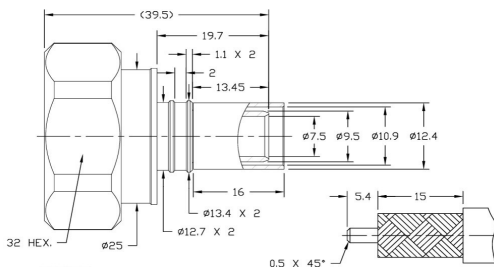


 Technical Data	STK SERIES CONNECTOR	 www.rfconnector.in						
Nomenclature: STRAIGHT PLUG			Page No. 1 of 1					
STK-5711- F26-RF400-827N-Y	STRAIGHT PLUG							
OUTLINE DRAWING								
 								
TECHNICAL DATA								
ELECTRICAL DATA								
Impedance	50 Ω							
Frequency range	DC to 3 Ghz							
Inner conductor	≤0.2							
Outer conductor	≤0.8							
Insulation resistance	≥10000							
Insert loss	≤0.05							
VSWR	≤1.15							
MATERIAL INFORMATION								
COMPONENTS	MATERIALS	PLATINGS (mm)						
Inner conductor	spring cipper	Ag 200						
Outer conductor	Brass	Copper (Albaloy)						
Ferrule	copper	Copper (Albaloy)						
Nut	Brass	Copper (Albaloy)						
Insulator	PTFE							
Gasket	Silicone rubber							
ENVIRONMENTAL INFORMATION								
Temperature range	-55°c~+155°c							
Waterproofing standard	IP67							
MECHANICAL INFORMATION								
Pin torque	25N.m							
(Nut) whorl pull	1000N							
Tensile force	400N							
Torsion	2N.m							
Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division Email: sales.blr@rfconnector.in
Sang	01.11.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	
This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.								www.rfconnector.in