



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: RIGHT ANGLE


Page No.

1 of 1

STK-5711- F26-RF400-ONI-SB-Y

RIGHT ANGLE

OUTLINE DRAWING

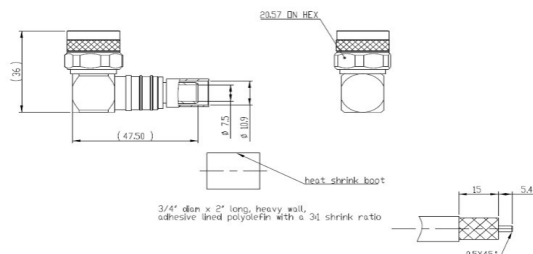

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency range	DC-6Ghz
VSWR	<1.35
Insert Loss	0.10(0-3G)
Insulation	>5000
Proof voltage	2500V
Outer conductor	<0.4
Inner conductor	<0.8

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
Inner conductor	Beryllium	Au>1.27
Outer conductor	Brass	Copper tin zinc
Insulator	PTFE	
Nut	Brass	Copper tin zinc

ENVIRONMENTAL INFORMATION

Temperature range	-55°C~+155°C
Weather standard	IEC 60068 55/155/56

MECHANICAL INFORMATION

Whorl pull	500N
Nut torque	5Nm
Tensile force	400N
Torsion	3Nm

Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.11.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-


Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of **Synergy Telecom P Ltd**- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from **Defense & Aerospace division**. This document and all it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in