Technical Data

STK SERIES CONNECTOR

www.rfconnector.in

QUALITY PRODUCT of INDIA

Nomenclature: STRAIGHT JACK

STK-5711- F26-RF400-UG-Y	STRAIGHT JACK

OUTLINE DRAWING

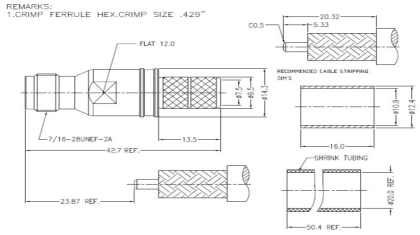

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Voltage rating	750V
Frequency range	0-6Ghz
Dielectric voltage	1000
Center contact	≤3m
Outer contact	≤2m
Insulation resistance	≥5000M
VSWR	1.30 Max 0.6 Ghz

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
Body	Brass	Albaloy
Contact Pin	Bronze	Gold
Insulator	TEFLON	
Barrel	Brass	Albaloy

ENVIRONMENTAL INFORMATION

Temperature range	-55°C to +125°C
Weather standard	IEC 60068 55/155/56

MECHANICAL INFORMATION

Center Cont	6 lbs Min
Outer Cont	-
Durability	> 500 cycles

Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.11.25	Krishnamurthy	-	0	-	-	-
				-	-	-	-
				-	-	-	-

Synergy Telecom P Ltd,
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India

Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand. www.rfconnector.in