


Technical Data	STK SERIES CONNECTOR	
----------------	----------------------	---

Nomenclature: CONN BNC MALE STRAIGHT PLUG	Page No.
	1 of 1

STK-5711- UD-RF400-CN-Y	CONN BNC MALE STRAIGHT PLUG
	OUTLINE DRAWING

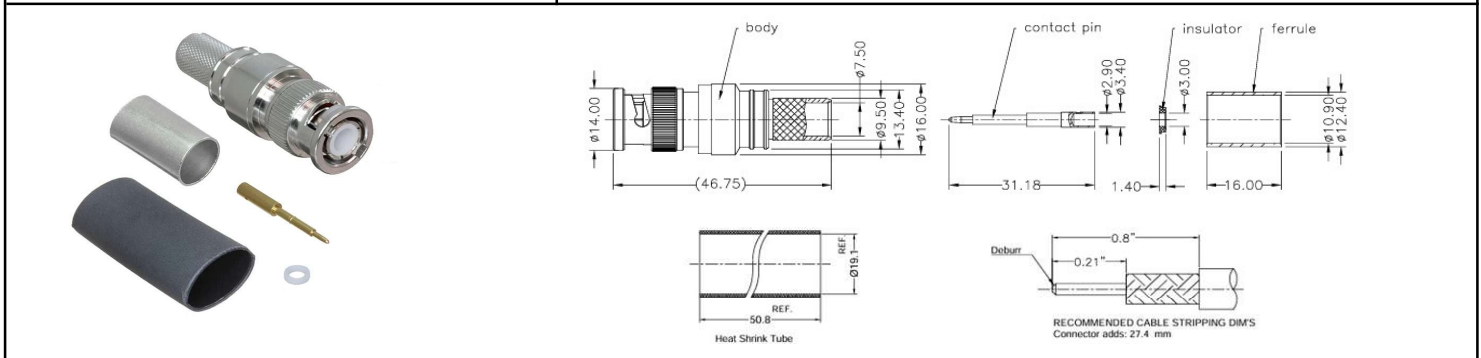

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω	
Frequency Range	DC to 4 GHz	
Working Voltage	2500	
Insulation Resistance (M Ω):	≥ 10000	
VSWR	$\leq 1.25(0-1\text{GHz}) / \leq 1.35(1-4\text{GHz})$	
Insertion Loss(dB, f/GHz)	-0.1x f	

MECHANICAL INFORMATION

Center Cont	Solder	
Outer Cont	Crimp	
Coupling Nut Torque (N.m)	N/A	
Cbl-Connector Retention Force (N)	500	
Climatic Class	IEC 60068 / 55/155/56	
Durability (cycles)	500	

DIMENSION

COMPONENTS	MATERIALS	FINISH	Thk. (μ ")
Body	Brass	Albaloy	80
Center Cont	Brass	Gold	50
Ferrule	Brass	Albaloy	80
Nut	Brass	Albaloy	80
Insulator	PTFE		
Gaskt	Silicone		

Originated	Date	Approved	Date	Rev	Amend	Name	Date	
Sang	27.10.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	
Email: sales.blr@rfconnector.in								

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and all it copies shall be returned to Synergy Telecom P.