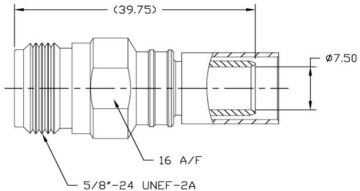



 Technical Data	STK SERIES CONNECTOR	 www.rfconnector.in						
Nomenclature: STRAIGHT JACK			Page No. 1 of 1					
STK-5711- UD-RF400-OG-Y	STRAIGHT JACK							
OUTLINE DRAWING								
   CABLE PREP. USE CST-400 (3192-004) .429" HEX.								
TECHNICAL DATA								
ELECTRICAL DATA								
Impedance	50 Ω							
Frequency range	DC-6Ghz							
VSWR	≤1.3(0-6Ghz)							
Insert Loss	≤0.10							
Insulation resistance	≥5000							
Proof voltage	1500							
Outer conductor	≤0.4							
Inner conductor	≤0.8							
MATERIAL INFORMATION								
COMPONENTS	MATERIALS	PLATINGS (mm)						
Inner conductor	spring bronze	Au>1.27						
Outer conductor	Brass	Copper-tin-zinc						
Insulator	PTFE							
ENVIRONMENTAL INFORMATION								
Temperature range	-55°C~+155°C							
Weather standard	IEC 60068 55/155/56							
MECHANICAL INFORMATION								
Torsion	2N.m							
Tensile force	400N							
Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	01.11.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	
This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.								Email: sales.blr@rfconnector.in
www.rfconnector.in								

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in