

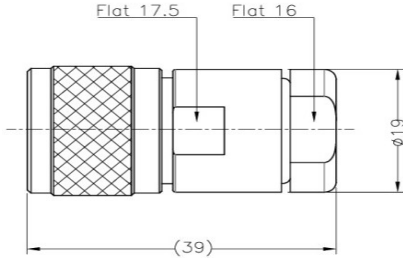


 Technical Data	STK SERIES CONNECTOR	 www.rfconnector.in	
Nomenclature: STRAIGHT PLUG			Page No. 1 of 1
STK-5711- UD-RF400-OND		STRAIGHT PLUG	
OUTLINE DRAWING			
			
TECHNICAL DATA			
ELECTRICAL DATA			
Impedance		50 Ω	
Frequency range		DC-6Ghz	
Working voltage		2500vrms	
Insertion loss		0.1x√Fghz	
VSWR		≤1.30	
MATERIAL INFORMATION			
COMPONENTS		MATERIALS	
Body		Brass	
Central Cont.		PB Bronze	
Insulator		PTFE	
Gasket		Silicon	
Nut		Brass	
		PLATINGS (mm)	
		Nickel	
		Gold	
		-	
		-	
		Nickel	
ENVIRONMENTAL INFORMATION			
Temperature range		-65°C~+85°C	
Weather standard		IEC 60068 55/155/56	
MECHANICAL INFORMATION			
Center Cont.		Solder	
Durability		500 Cycles	
Coupling Nut Torque		1.7 N.m	
Outer Cont.		Clamp	
Originated	Date	Approved	Date
Sang	01.11.25	Krishnamurthy	-
Synergy Telecom P Ltd, WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India		Rev	Amend
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-
		-	-