

 Technical Data	STK SERIES CONNECTOR	 www.rfconnector.in	
---	-----------------------------	---	---

Nomenclature: RIGHT ANGLE


Page No.

1 of 2

STK-5711- UD-RF400-ONI-SB-E

RIGHT ANGLE

OUTLINE DRAWING

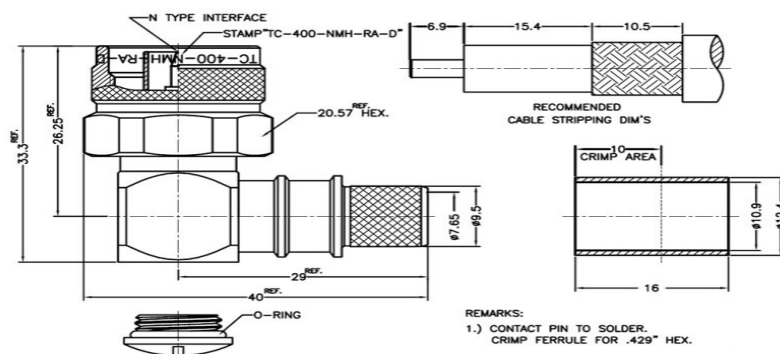

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Voltage rating	1000 vrms
Frequency range	0-11Ghz
Dielectric voltage	1500V
Center contact	$\leq 1\text{m}$
Outer contact	$\leq 0.25\text{m}$
Insulation resistance	$\geq 5000\text{M}$
VSWR	≤ 1.25 (DC-2.5Ghz)

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
Central contact	Brass	Gold
Outer contact	Bronze	Gold
Body	Stainless steel	-
Coupling nut	Stainless steel	-
Crimp sleeve	Brass	Alballoy
Dielectric	PTFE	-

ENVIRONMENTAL INFORMATION

Temperature range	-55°c~+155°c
Weather standard	IEC 60068 55/155/56

 Technical Data	STK SERIES CONNECTOR		 www.rfconnector.in					
Nomenclature: RIGHT ANGLE				Page No. 2 of 2				
MECHANICAL INFORMATION								
Force to engage and disengage		6 lbs Max						
Center contact		6 lbs Min						
Coupling torque		30 in-lbs Min						
Durability		≥500 cycles						
Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	01.11.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd, WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	
This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand. www.rfconnector.in								Email: sales.blr@rfconnector.in