



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: STRAIGHT PLUG


Page No.

1 of 1

STK-5711- UD-RF400-ONI-Y

STRAIGHT PLUG

OUTLINE DRAWING

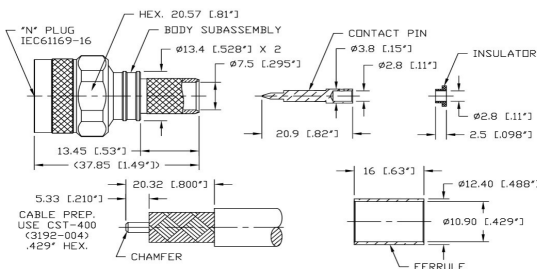

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency range	DC-6Ghz
VSWR	<1.30 to 6 Ghz
Insert Loss	0.05xf(Ghz)
Insulation	>5000
Dielectric voltage	1500
Outer conductor	<0.4
Inner conductor	<0.8

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
Body	Brass	Albaloy
Contact Pin	Brass	Gold
Insulator	PTFE	
Ferrule	Copper	Albaloy
Gasket	Silicon	

ENVIRONMENTAL INFORMATION

Temperature range	-55°C~+125°C
Weather standard	IEC 60068 55/155/56

MECHANICAL INFORMATION

Coipling Nut	1.7 N.m
Nut retention	500N
Torque	1
Durability	≥500

Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.11.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-

Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and all it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in