



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: STRAIGHT PLUG


Page No.

1 of 2

STK-5711-F26-240-RN-Y

STRAIGHT PLUG

OUTLINE DRAWING

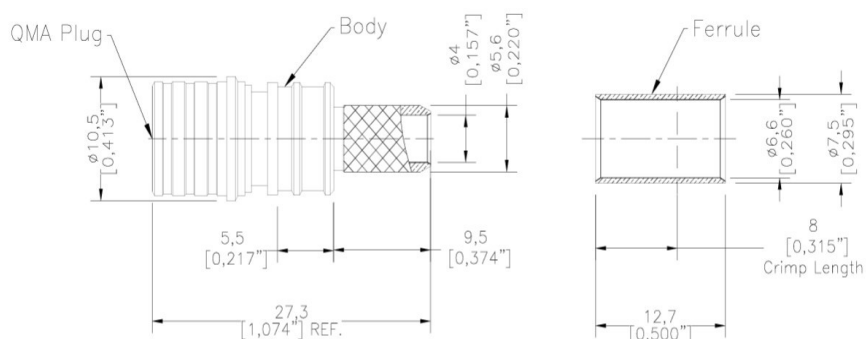

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency range	DC to 8 Ghz
Dielectric withstanding voltage	1000V
Insulation resistance	≥ 5000
VSWR	≤ 1.30

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
BODY	BRASS	ALBALOY
Center Cont	Beryllium copper	Gold
Ferrule	Copper	ALBALOY
Insulator	PTFE	-
Gasket	Silicone	-
Nut	BRASS	ALBALOY

ENVIRONMENTAL INFORMATION

Temperature range	-40°C~+125°C
Thermal Shock	MIL-STD 202G

		STK SERIES CONNECTOR		 www.rfconnector.in			
Nomenclature: STRAIGHT PLUG							Page No. 2 of 2
MECHANICAL INFORMATION							
CENTER CONT				Finger Contact			
Outer Cont.				Crimp			
Torque				NA			
Connector retention				250			
Durability				100			
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.11.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd, WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-
				-	-	-	-
							 Defence & Aerospace Division Email: sales.blr@rfconnector.in
This document is the property of Synergy Telecom P Ltd - New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division . This document and al it copies shall be returned to Synergy Telecom P Ltd on demand. www.rfconnector.in							