



STK SERIES CONNECTOR



Nomenclature: STRAIGHT PLUG


Page No.

1 of 2

STK-5711-F26-240-TN-Y

STRAIGHT PLUG

OUTLINE DRAWING

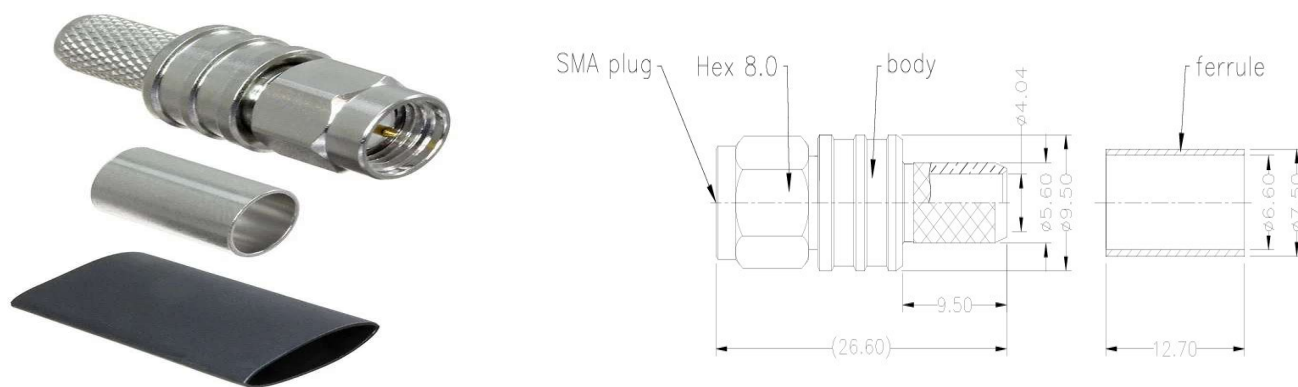

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency Range	DC to 6 GHz
Working Voltage	1000V
Insulation Resistance	≥ 10000
VSWR	≤ 1.30

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
BODY	BRASS	ALBALOY
Ceneter Cont.	QBe2	Gold
Ferrule	BRASS	ALBALOY
Gasket	Silicone	
Insulator	PTFE	

ENVIRONMENTAL INFORMATION

Temperature range	-40°C~+125°C
Thermal Shock	MIL-STD 202G

 Technical Data		STK SERIES CONNECTOR		 www.rfconnector.in			
Nomenclature: STRAIGHT PLUG							Page No. 2 of 2
MECHANICAL INFORMATION							
Center Cont.				Finger Contact			
Outer Cont.				Crimp			
Coupling Nut Torque				1.1			
Connector rentention force				500			
Durability				500 cycles			
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.11.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd, WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-
				-	-	-	-
				 Defence & Aerospace Division Email: sales.blr@rfconnector.in			
This document is the property of Synergy Telecom P Ltd - New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division . This document and al it copies shall be returned to Synergy Telecom P Ltd on demand. www.rfconnector.in							