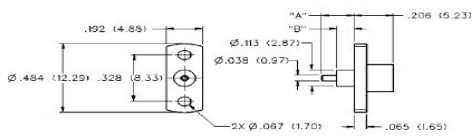


Technical Data	STK SERIES CONNECTOR						 QUALITY PRODUCT OF INDIA	
Nomenclature:2-Hole Flange Mount Jack Receptacle - Extended Dielectric							Page No. 1 of 1	
STK-571125581354			2-Hole Flange Mount Jack Receptacle - Extended Dielectric					
			OUTLINE DRAWING					
								
TECHNICAL DATA								
ELECTRICAL DATA								
Impedance	50Ω							
Frequency range	DC-6 GHZ							
Temperature Rating	Minus -55 to +155 deg C							
V.S.W.R	1.05 + 0.050 x F(GHz) Maxi							
Dielectric Withstanding Voltage	≥1000 VEF MINI							
Insulation Resistance	≥1000MΩ							
Voltage Rating	335 VEF MAX							
Insertion loss	0.03 √F(GHz) dB Maxi							
MATERIAL INFORMATION								
Parts	Material	Surface Plating						
Connector Body	Brass	NICKEL 2						
Insulator	PTFE(Teflon)							
Center conductor	BERYLLIUM COPPER	NICKEL 2						
Gasket	N/A							
RoHS	Compliance							
Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division Email: sales.blr@rfconnector.in
Sang	11.10.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	
This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.								
www.rfconnector.in								