



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: GLASS BEED FOR SMA CONNECTOR


Page No.

1 of 1

STK-571127861630

GLASS BEED FOR SMA CONNECTOR

OUTLINE DRAWING

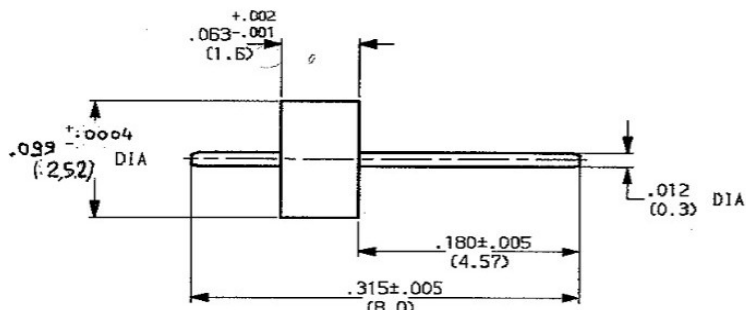

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50Ω
Frequency range	0-18 Ghz
Rating	-65/+200 * C
VSWR	1.02 + 0.003xF(Ghz) Max
Voltage rating	335 Vrms Max
Dielectric standing voltage	1000 Vrms mini
Hermetic seal	10-8

MECHANICAL INFORMATION

Cable retention	NA
Center contact Retentin	
Axial force 0mating end	4.5 lb mini 20 N
Axial force opposite end	4.5 lb mini 20 N
RECOMMENDED TORQUES	
Mating	NA
Panel Nut	NA
Clamp nut	NA

ENVIRONMENTAL

PARTS	MATERIAL	FINISH
Body	-	-
couter contact	FERRO NICKEL	GOLD OVER NICKEL
Center contact Retentin	FERRO NICKEL	GOLD OVER NICKEL
Insulator	MATCHED GLASS	-

Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	27.10.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd, WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-
				-	-	-	-


Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in