


Technical Data	STK SERIES CONNECTOR	
-----------------------	-----------------------------	---

Nomenclature: CONN RF50 SMP STRAIGHT RP SMOOTH BORE	Page No. 1 of 1
--	---------------------------

STK-571128871497	CONN RF50 SMP STRAIGHT RP SMOOTH BORE
-------------------------	---------------------------------------

OUTLINE DRAWING

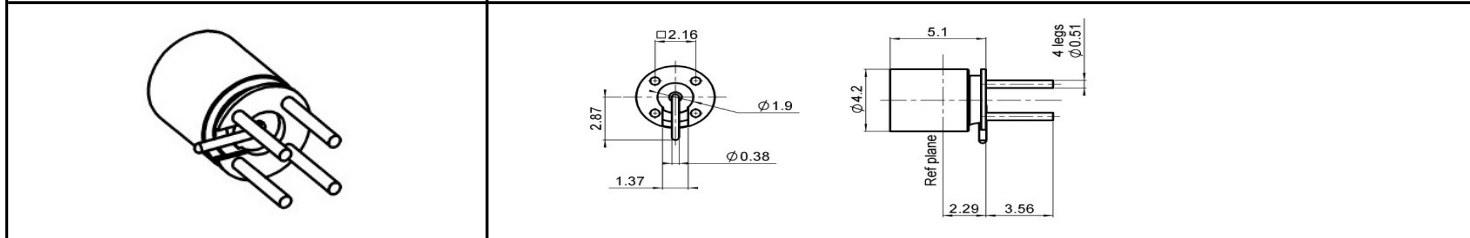

TECHNICAL DATA

ELECTRICAL DATA

Frequency (MHz)	0-40* GHz
VSWR	1.15** + 0.0000 x F(GHz) Maxi
Impedance	50 Ω
Insertion loss	0.12* F(GHz) dB Maxi
RF leakage	(- (NA - F(GHz)) dB Maxi)
Dielectric withstanding voltage	500 Veff mini
Voltage rating	335 Veff Maxi
Insulation resistance	5000 MΩ mini

MECHANICAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (μm)
BODY	STAINLESS STEEL + BRASS	PASSIVATED + GOLD 0.5 OVER NICKEL 2
CENTER CONTACT	BERYLLIUM COPPER	GOLD 1.27 OVER NICKEL 1.27
Insulator	PTFE	

ENVIRONMENTAL

Operating temperature	(-65/+165 ° C)
Hermetic seal	NA Atm.cm3/s
Panel leakage	NA

Originated	Date	Approved	Date	Rev	Amend	Name	Date	
Sang	27.10.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	



Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in