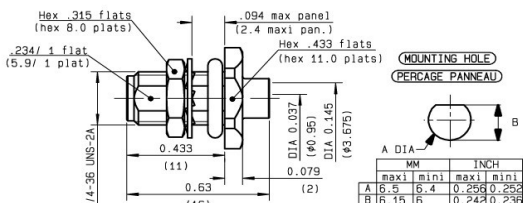


Technical Data		STK SERIES ANTENNA						
Nomenclature: SMA / STRAIGHT BULKHEAD JACK PAN				Page No. 1 of 1				
STK-571174911383		SMA / STRAIGHT BULKHEAD JACK PAN						
OUTLINE DRAWING								
								
TECHNICAL DATA								
ELECTRICAL DATA								
Impedance		50 Ω		Temperature rating		-65/+105 °C		
Frequency		0-18 GHz		Mechanical Durability		500 cycles		
VSWR		1.05 + 0.0080 x F(GHz) Maxi						
Insertion loss		0.03 √F(GHz) dB Maxi						
RF leakage		- (90 - F(GHz)) dB Maxi						
Voltage rating		500 Veff Maxi						
Dielectric withstanding voltage		1000 Veff mini						
Insulation resistance		5000 MΩ mini						
MATERIAL INFORMATION								
COMPONENTS		MATERIALS		PLATING (µm)				
BODY		STAINLESS STEEL		GOLD 0.5 OVER NICKEL 2				
CENTER CONTACT		BERYLLIUM COPPER		GOLD 1.3 OVER NICKEL2				
OUTER CONTACT		-		-				
INSULATOR		PTFE		-				
GASKET		SILICONE RUBBER		-				
OTHERS PARTS		BRASS		GOLD 0.2 OVER NICKEL 2				
Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	25.09.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	Email: sales.blr@rfconnector.in
This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.								
www.rfconnector.in								

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in