


Technical Data	STK SERIES ANTENNA	
----------------	--------------------	---

Nomenclature: CONN RF SMB PL ST SR CA 2.2	Page No. 1 of 1
---	--------------------

STK-571182301231	CONN RF SMB PL ST SR CA 2.2
------------------	-----------------------------

OUTLINE DRAWING

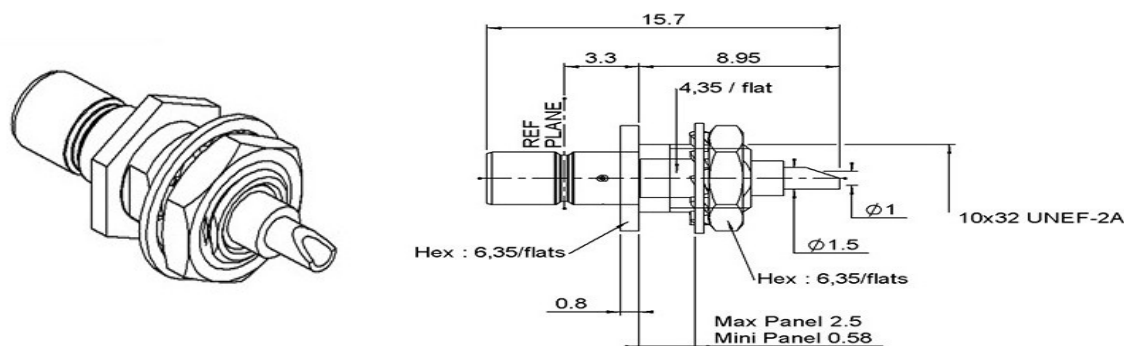

TECHNICAL DATA

ELECTRICAL DATA	
Impedance	50 Ω
Frequency	0-4 GHz
VSWR	$1.05 + 0.0080 \times F(\text{GHz})$ Maxi
Insertion loss	$0.03 \times \sqrt{F(\text{GHz})}$ dB Maxi
RF leakage	- (57 - F(GHz)) dB Maxi
Voltage rating	500 Veff Maxi
Dielectric withstanding voltage	1000 Veff mini
Insulation resistance	1000 M Ω mini

MECHANICAL INFORMATION		ENVIRONMENTAL	
Axial force – Mating end	10 N mini	Operating temperature	-65/+165 ° C
Axial force – Opposite end	10 N mini	Hermetic seal	NA Atm.cm3/s
Torque	NA N.cm mini	Panel leakage	NA
Mating	NA N.cm		
Panel nut	60 N.cm		
Weight	1,2000 g		
Mating life	500 Cycles mini		

DIMENSION

COMPONENTS	MATERIALS	FINISH
BODY	BRASS	GOLD 0.2 OVER NICKEL 2
CENTER CONTACT	BRASS	GOLD 1.3 OVER NICKEL 2
OUTER CONTACT		
INSULATOR	PTFE	
GASKET		
OTHERS PARTS	BRASS	GOLD 0.2 OVER NICKEL 2

Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	27.10.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-



Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and all its copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in