Technical Data	STK SERIES ADAPTER	QUALITY PRODUCT of INDIA
Nomenclature: CONNECTOR RF50 SMP INSER AD FE-FE L34.85		Page No. 1 of 1

STK-571623721459	CONNECTOR RF50 SMP INSER AD FE-FE L34.85

OUTLINE DRAWING

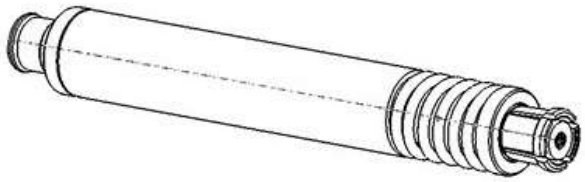

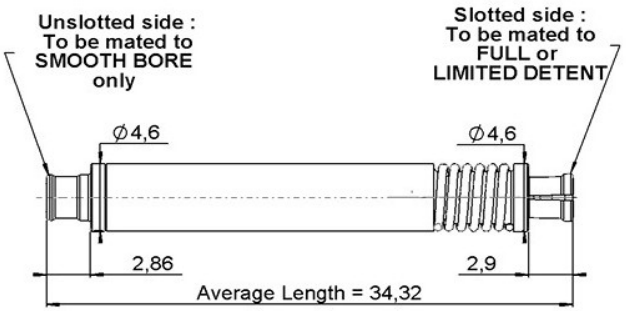

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-18 GHz
VSWR	1.35* + 0,0000 x F(GHz) Maxi
Insertion loss	0.12 ÖF(GHz) dB Maxi
RF leakage	- (NA - F(GHz)) dB Maxi
Voltage rating	335 Veff Maxi
Dielectric withstanding voltage	500 Veff mini
Insulation resistance	5000 MΩ mini

MECHANICAL INFORMATION		ENVIRONMENTAL	
Axial force – Mating end	6.8 N mini	Operating temperature	-65/+85 ° C
Axial force – Opposite end	6.8 N mini	Hermetic seal	NA Atm.cm3/s
Torque	NA N.cm mini	Panel leakage	NA
Mating	NA N.cm		
Panel nut	NA N.cm		
Mating life	1000 Cycles mini		
Weight	2,5700 g		

DIMENSION

COMPONENTS	MATERIALS	PLATINGS (mm)
BODY	BRONZE	NPGR
CENTER CONTACT	BERYLLIUM COPPER	GOLD 1.27 OVER NICKEL 1.27
INSULATOR	PEI	
GASKET		
SPRING		PASSIVATED
OUTER CONTACT	BERYLLIUM COPPER	GOLD 1.3 OVER NICKEL 2

Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	30.10.25	Krishnamurthy	-	0	-	-	-
				-	-	-	-
				-	-	-	-

Synergy Telecom P Ltd,

WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India

Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in