


Technical Data	STK SERIES ADAPTER	
----------------	--------------------	---

Nomenclature: Tactical Grid Antenna 1150MHz to 2000MHz	Page No. 1 of 1
--	--------------------

STK-587826131300	Tactical Grid Antenna 1150MHz to 2000MHz
------------------	--

OUTLINE DRAWING

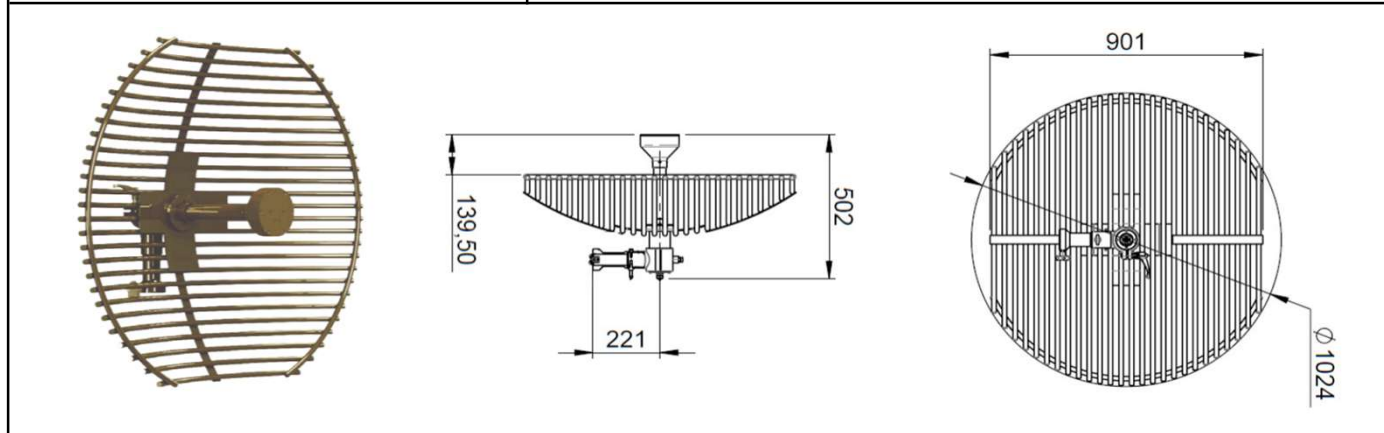

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω	
Frequency band (MHz)	1150 $\div$ 2000	
VSWR	1600-2000 MHz	≤ 2
VSWR + 4m cable*	1600-2000 MHz	≤ 1.5
Polarization	linear: horizontal or vertical	
Gain (dBi)	1600-2000 MHz	> 23
HPBW ($^{\circ}$) - H-plane	@ 2000 MHz	12
HPBW ($^{\circ}$) - E-plane	@ 2000 MHz	12
Forward sidelobes ratio (dB)	90 $^{\circ}$ $\div$ 180 $^{\circ}$	
Cross polarization (dB)	> 20 (typical 30)	
Front-to-back ratio (dB)		> 25
Continuous max power (W)		50
Operating Temp. Range ($^{\circ}$ C)		(-40 $\div$ +70)
Storage Temp. Range ($^{\circ}$ C)		(-50 $\div$ +90)
Lightning Protection	DC grounded	

MECHANICAL INFORMATION

Connector	Nf
Dimensions (mm)	901 $\times$ 1024 $\times$ 502
Weight (kg)	< 7.5
Wind Load @ 150 Km/h (N)	front 340 side 75
Colour	RAL 0904010
Materials	Aluminium Alloy Stainless
Quick fastener mount	for mast $\varnothing$ 38 mm

ENVIRONMENTAL

Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	30.10.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in