


Technical Data	STK SERIES ANTENNA	
Nomenclature: ANTENNA 5 PORT 50 Ohm 5dbi		Page No.
		1 of 1

STK-587882741276	ANTENNA 5 PORT 50 Ohm 5dbi
------------------	----------------------------

OUTLINE DRAWING

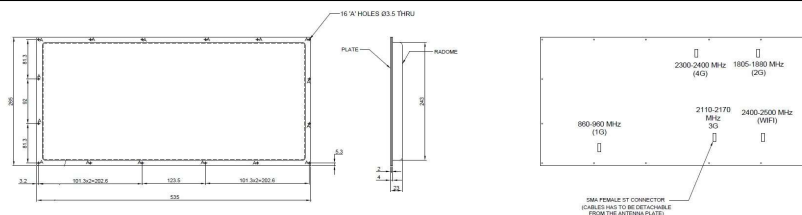

TECHNICAL DATA

ELECTRICAL DATA

Frequency (MHz)	860-960/1805-1880/2110-2170/ 2300-2400/2400-2500
Impedance(Ω)	50
Maximum Input Power(W)	50
Front-to-back ratio(dB)	≥ 6
Half-Power beam width($^{\circ}$)	Hor: 75 $\pm$ 15, Ver:75 $\pm$ 15
Isolation(dB)	>20
Gain(dB)	8dBi /9dBi /9dBi /9dBi /9dBi (Tol.: ± 0.5 dBi)
Lightning protection	DC Ground
VSWR	≤ 2.2
Polarization	Vertical

MECHANICAL INFORMATION

CONNECTOR	5X SMA (F) RCPT STRAIGHT
CONNECTION POSITION	BOTTOM
REFLECTOR MATERIAL	ALUMINIUM
ROTED WIND VELOCITY (M/S)	36.9
RODOME MATERIAL/COLOUR	ABS/MILKY WHITE
CABLE ASSEMBLY	SMA M RIGHT ANGLE
WIND LOADING AREA	≥0.2
CABLE TYPE	RG-402 SPC CONDUCTOR FEB JACKET
OPERATING TEMPERATURE	(-40.55)
SIZE	494X278X28
QUANTITY	5 NOS

								 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Originated	Date	Approved	Date	Rev	Amend	Name	Date	
Sang	11.10.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.