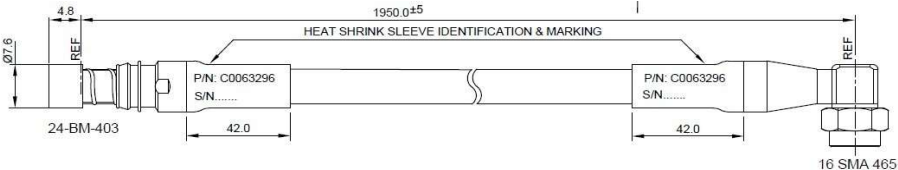


Technical Data		STK SERIES CABLE ASSEMBLY					
Nomenclature: BIT/CAL RF CABLE, AAU-SSTRU						Page No. 1 of 1	
STK-602221571306		BIT/CAL RF CABLE, AAU-SSTRU					
		OUTLINE DRAWING					
							
TECHNICAL DATA							
ELECTRICAL DATA							
Frequency (MHz)		2-18 GHz					
Return Loss		14db @18Ghz					
Impedance (Ω)		50 OHMS					
Insertion Loss		2.6dB @18 Ghz					
MECHANICAL INFORMATION							
WEIGHT		154±15 grams					
LENGTH		1950 mm, ±5 mm					
DIMENSIONS:		AS PER THE DRAWING					
CABLE FINISH		FINISHED WITH JACKET WITHSTANDS 200°C & ABRASION AS PER MIL-T-81490A, PARA. 4.7.19, PROC. II.					
CONNECTOR FINISH		CENTRE CONTACT GOLD PLATED AS PER MIL-G-45204 TYPE II, CLASS 1(OR EQUIVALENT).					
Originated	Date	Approved	Date	Rev	Amend	Name	Date
SANG	12.09.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-
				Email: sales.blr@rfconnector.in			
This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.							
www.rfconnector.in							