


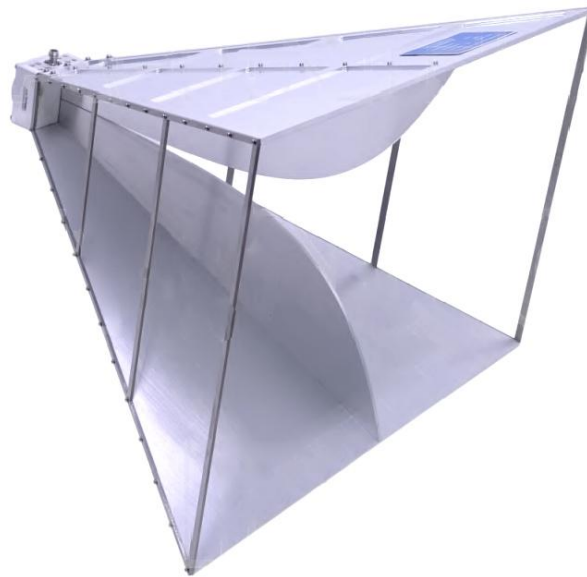

Product Description:

Broadband horn antenna operates from 0.5 to 30GHz with a nominal 12dB gain and low VSWR 1.5:1 with 2.4mm Female output connector. The model has uniform gain through its frequency span, providing efficient performance characteristics and directionality. It can handle 10W continuously and 20W peak power. Constructed of lightweight corrosion-resistant aluminum, the antenna will provide years of trouble-free indoor and outdoor service. This broadband horn antenna is linearly polarized and ideally suited for EMI testing, direction finding, surveillance, antenna gain and pattern measurements and other applications.

Technical Specifications

Electrical Specification	
Frequency, Min (GHz)	0.5
Frequency, Max (GHz)	30
Gain, Typ (dBi)	12
Polarization	Linear
3dB Beamwidth, E-Plane, Min (Deg.)	20
3dB Beamwidth, E-Plane, Max (Deg.)	111
3dB Beamwidth, H-Plane, Min (Deg.)	16
3dB Beamwidth, H-Plane, Max (Deg.)	84
Cross Pol. Isolation, Typ (dB)	35
VSWR, Typ	1.5:1
Impedance, (Ohm)	50



KHASRA NO. 33/23, Mundka Industrial Area, Mundka, New Delhi, Delhi, 110041

PH:- 011-28533349, MOB:- 91-7217885948, FAX:- 011-28533349

EMAIL:- INFO@SYNERGYTPL.COM, WEBSITE:- WWW.RFCONNECTOR.IN



KHASRA NO. 33/23, Mundka Industrial Area, Mundka, New Delhi, Delhi, 110041
PH:- 011-28533349, MOB:- 91-7217885948, FAX:- 011-28533349
EMAIL:- INFO@SYNERGYTPL.COM, WEBSITE:- WWW.RFCONNECTOR.IN

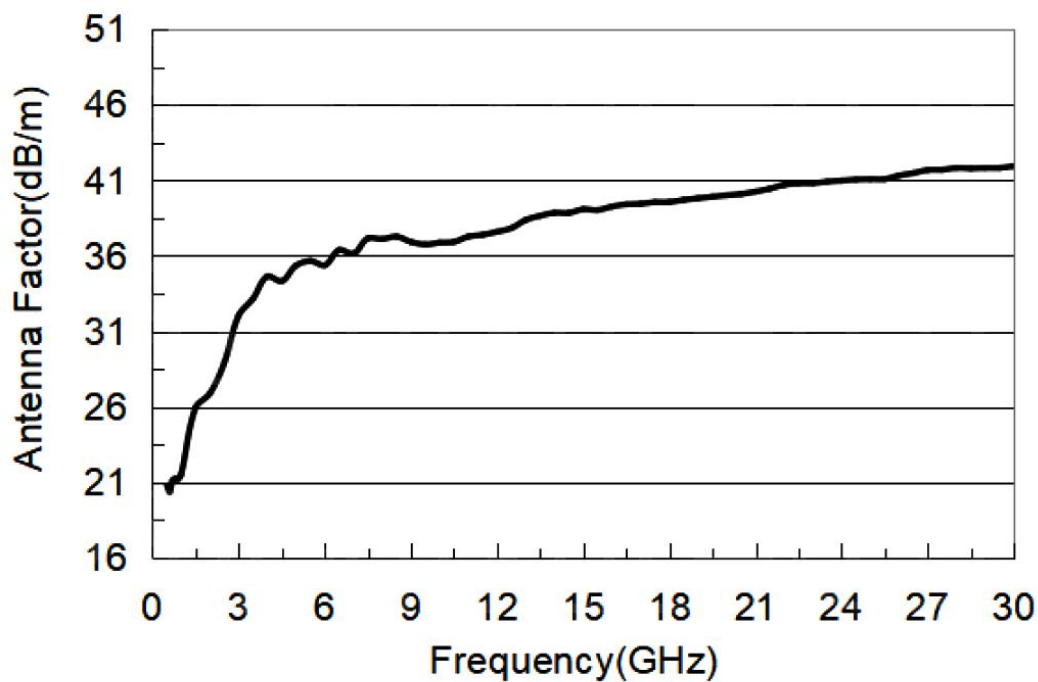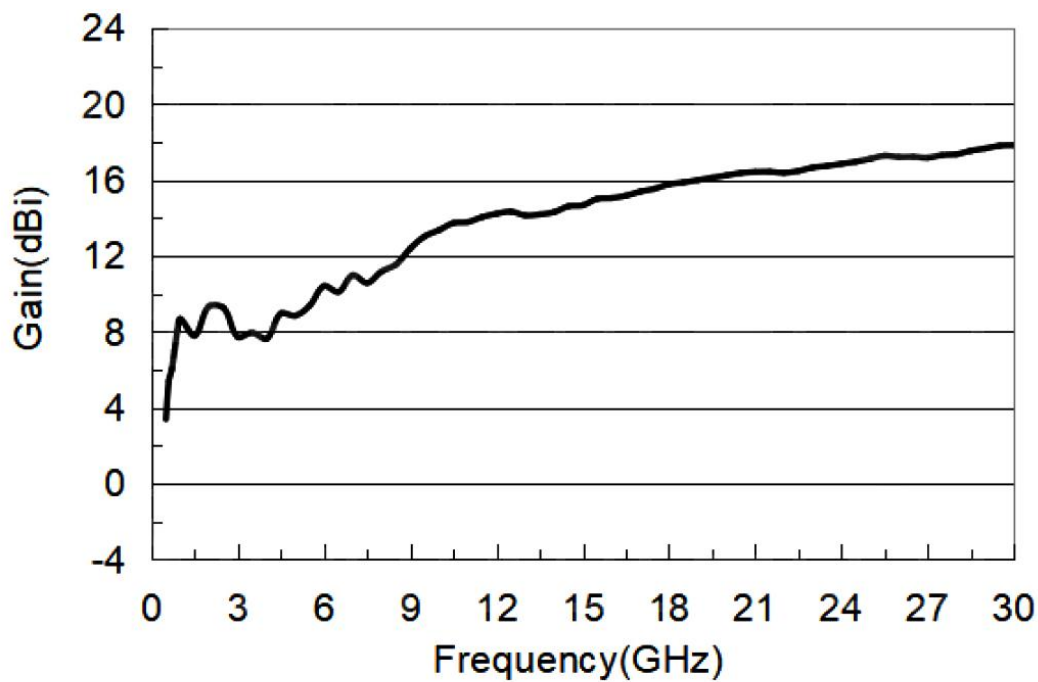




Antenna Factor (Table)

Frequency(GHz)	Gain(dBi)	Antenna Factor(dB/m)
0.5	3.39	20.80
0.6	5.40	20.37
0.7	6.00	21.12
0.8	7.02	21.25
0.9	8.06	21.23
1.0	8.67	21.54
2.0	9.34	26.89
3.0	7.71	32.04
4.0	7.62	34.63
5.0	8.85	35.34
6.0	10.41	35.37
7.0	10.98	36.14
8.0	11.17	37.10
9.0	12.38	36.91
10.0	13.35	36.86
12.0	14.21	37.58
14.0	14.30	38.83
16.0	15.04	39.25
18.0	15.76	39.55
20.0	16.23	40.00
22.0	16.37	40.68
24.0	16.85	40.97
26.0	17.20	41.30
28.0	17.35	41.80
30.0	17.83	41.92

Cross Polarization Isolation

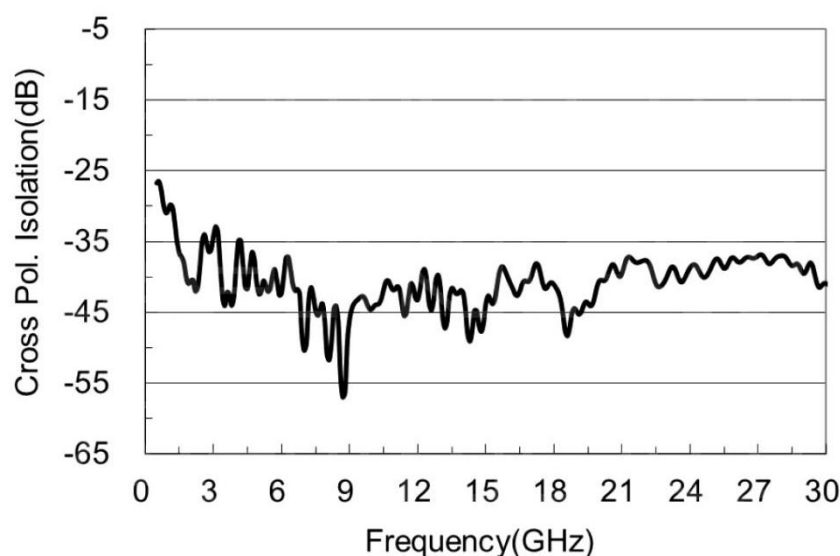


KHASRA NO. 33/23, Mundka Industrial Area, Mundka, New Delhi, Delhi, 110041

PH:- 011-28533349, MOB:- 91-7217885948, FAX:- 011-28533349

EMAIL:- INFO@SYNERGYTPL.COM, WEBSITE:- WWW.RFCONNECTOR.IN




VSWR

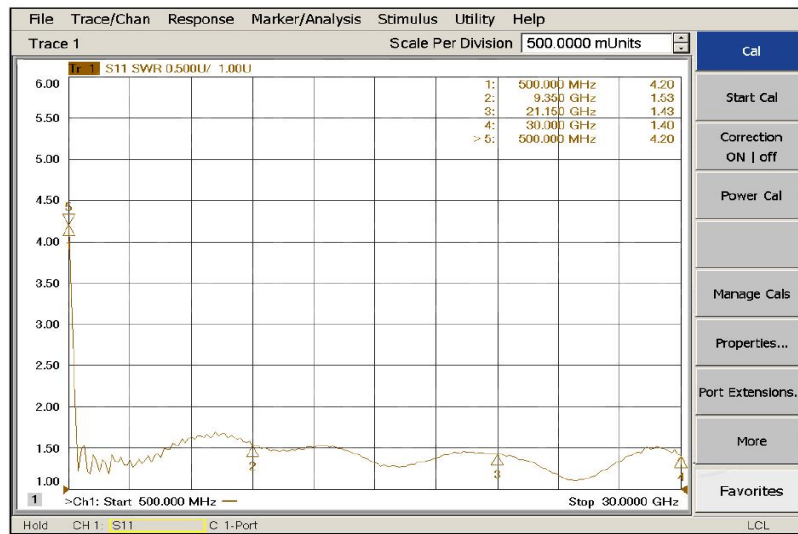


Beamwidth

3dB Beamwidth

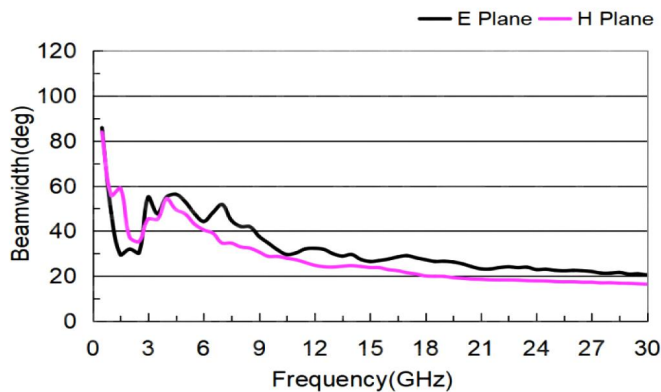


10dB Beamwidth

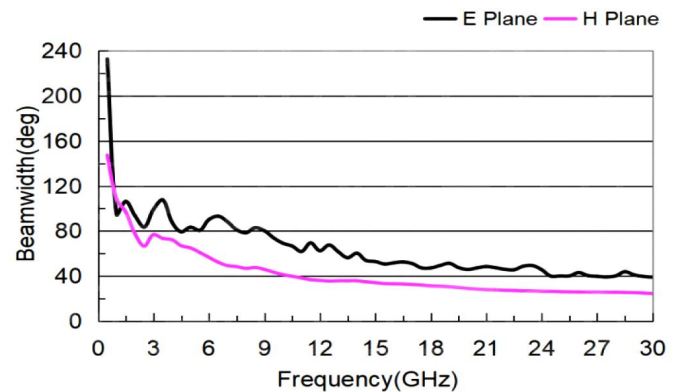


Pattern

Frequency:0.500GHz

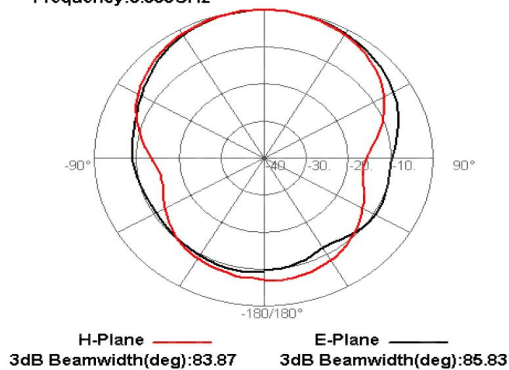


Frequency:0.600GHz

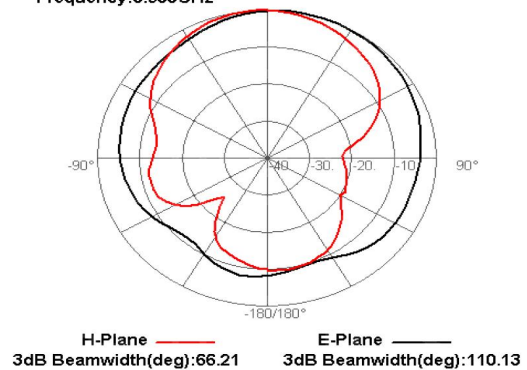




Frequency:0.700GHz

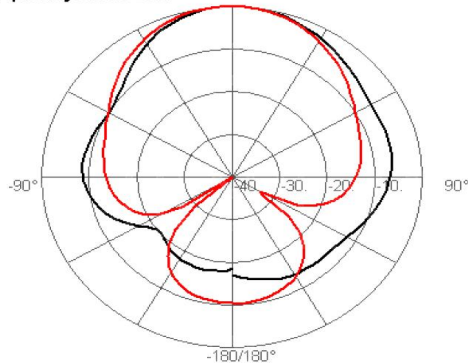


H-Plane — 3dB Beamwidth(deg):59.09
E-Plane — 3dB Beamwidth(deg):58.81

Frequency:0.800GHz

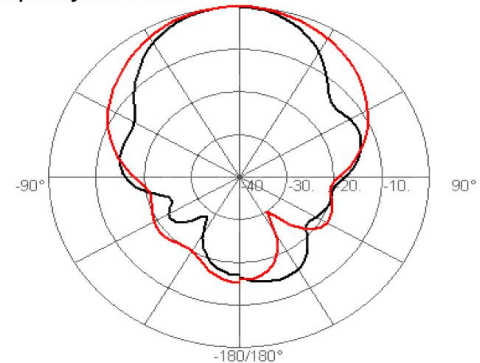


H-Plane — 3dB Beamwidth(deg):67.12
E-Plane — 3dB Beamwidth(deg):46.92

Frequency:0.900GHz

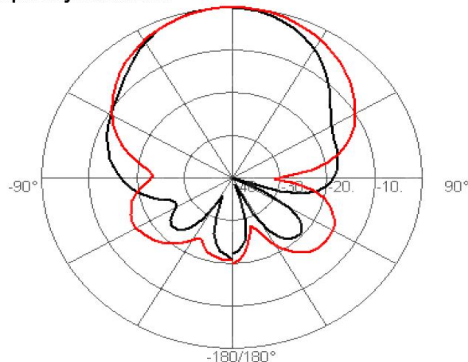


H-Plane — 3dB Beamwidth(deg):61.93
E-Plane — 3dB Beamwidth(deg):49.73

Frequency:1.000GHz

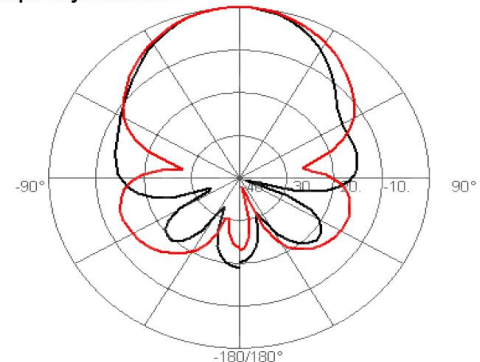


H-Plane — 3dB Beamwidth(deg):55.69
E-Plane — 3dB Beamwidth(deg):48.13

Frequency:2.000GHz

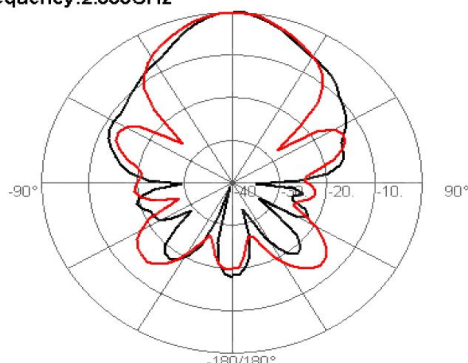

H-Plane — 3dB Beamwidth(deg):37.13
E-Plane — 3dB Beamwidth(deg):31.93


Frequency:3.000GHz

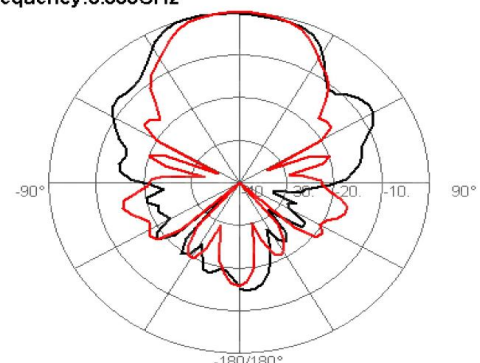

H-Plane — 3dB Beamwidth(deg):45.31
E-Plane — 3dB Beamwidth(deg):55.05




Frequency:4.000GHz

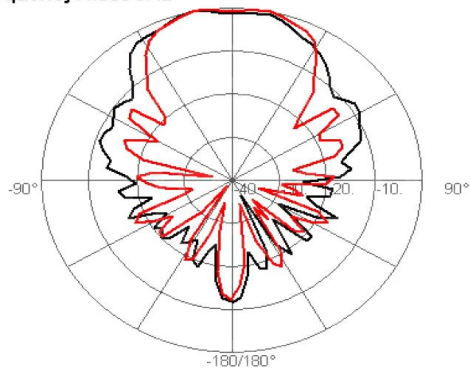


H-Plane — 3dB Beamwidth(deg):54.34
E-Plane — 3dB Beamwidth(deg):55.12

Frequency:5.000GHz

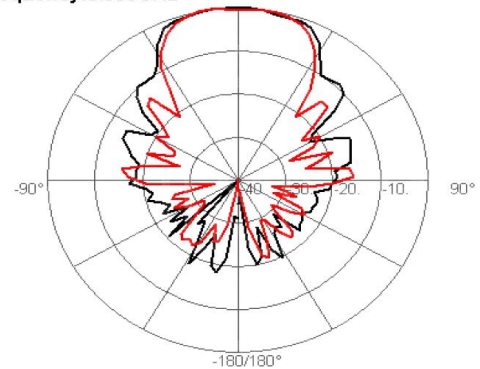


H-Plane — 3dB Beamwidth(deg):47.59
E-Plane — 3dB Beamwidth(deg):52.99

Frequency:6.000GHz

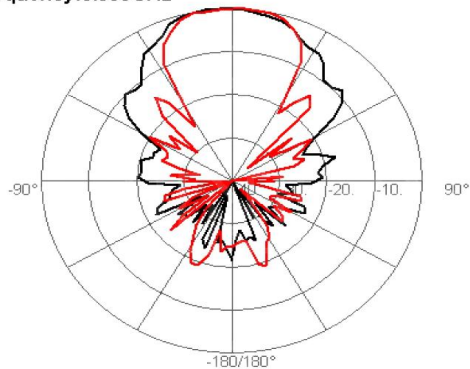


H-Plane — 3dB Beamwidth(deg):40.48
E-Plane — 3dB Beamwidth(deg):44.21

Frequency:7.000GHz

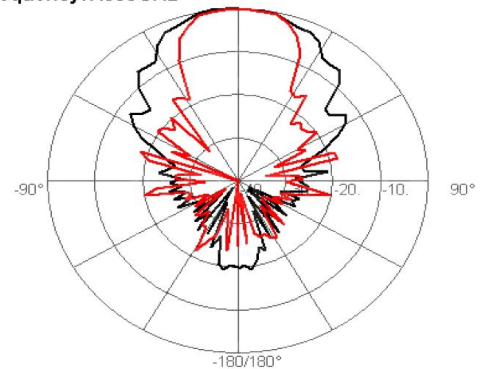


H-Plane — 3dB Beamwidth(deg):34.62
E-Plane — 3dB Beamwidth(deg):51.77

Frequency:8.000GHz

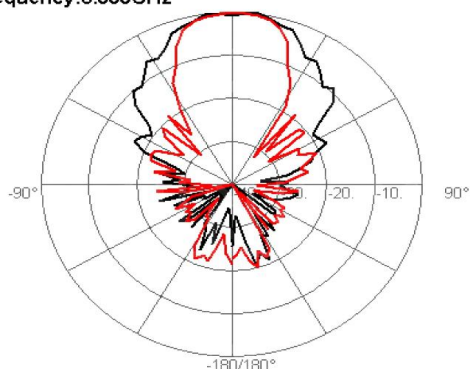

H-Plane — 3dB Beamwidth(deg):32.93
E-Plane — 3dB Beamwidth(deg):41.98


Frequency:9.000GHz

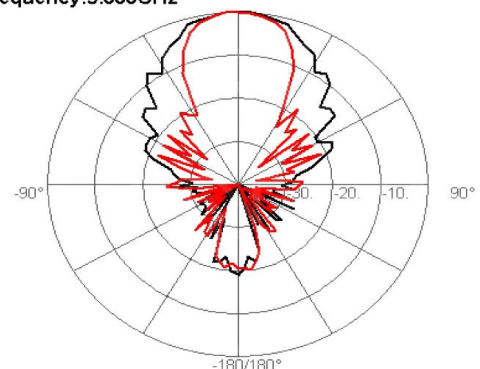

H-Plane — 3dB Beamwidth(deg):30.66
E-Plane — 3dB Beamwidth(deg):37.56




Frequency:10.000GHz

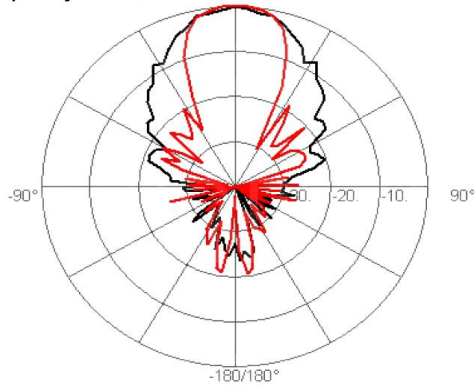


H-Plane — 3dB Beamwidth(deg):28.70
E-Plane — 3dB Beamwidth(deg):31.63

Frequency:12.000GHz

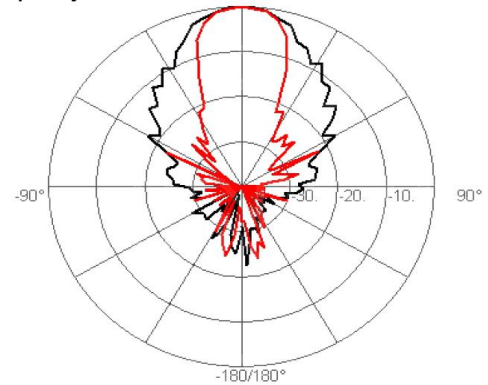


H-Plane — 3dB Beamwidth(deg):24.78
E-Plane — 3dB Beamwidth(deg):32.30

Frequency:14.000GHz

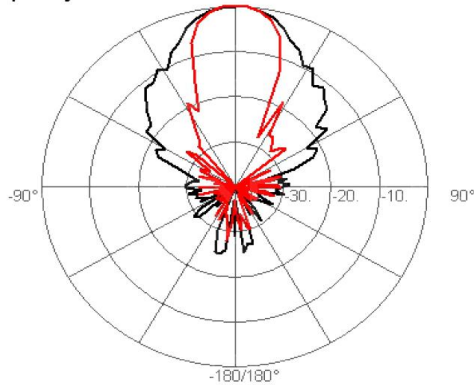


H-Plane — 3dB Beamwidth(deg):24.58
E-Plane — 3dB Beamwidth(deg):29.56

Frequency:16.000GHz

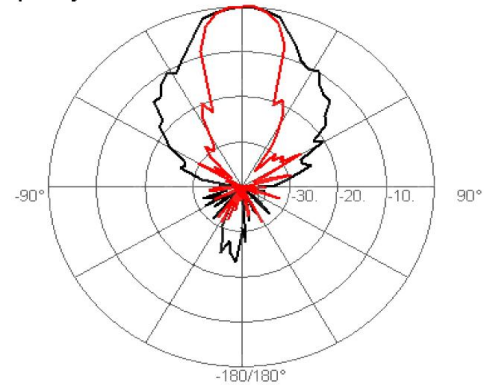


H-Plane — 3dB Beamwidth(deg):22.79
E-Plane — 3dB Beamwidth(deg):27.53

Frequency:18.000GHz

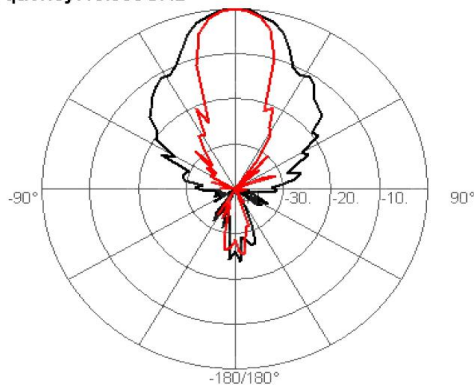

H-Plane — 3dB Beamwidth(deg):20.03
E-Plane — 3dB Beamwidth(deg):27.24


Frequency:20.000GHz

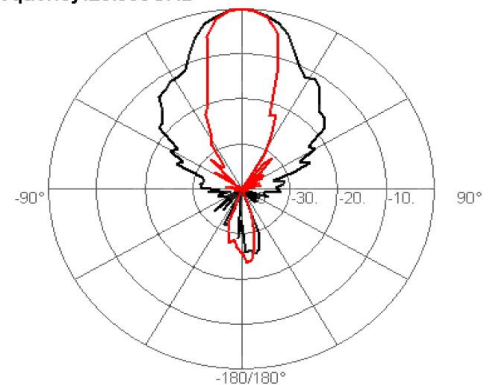

H-Plane — 3dB Beamwidth(deg):18.98
E-Plane — 3dB Beamwidth(deg):25.40




Frequency:22.000GHz

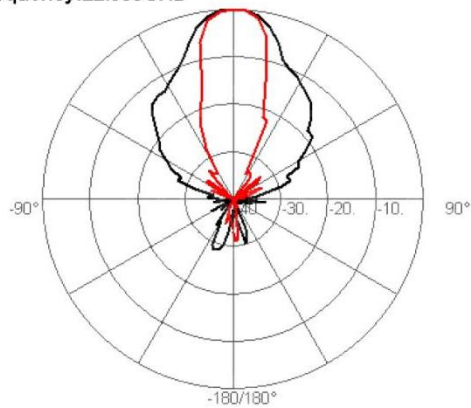


H-Plane — 3dB Beamwidth(deg):18.24
E-Plane — 3dB Beamwidth(deg):23.76

Frequency:24.000GHz

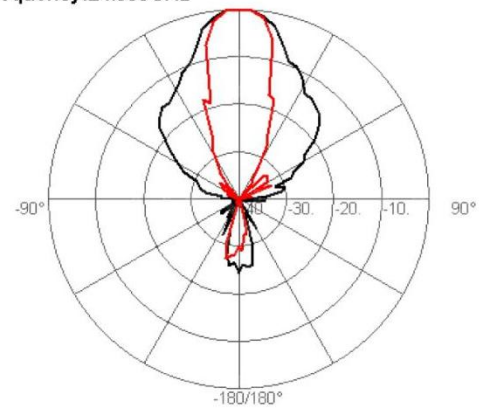


H-Plane — 3dB Beamwidth(deg):17.86
E-Plane — 3dB Beamwidth(deg):22.84

Frequency:26.000GHz

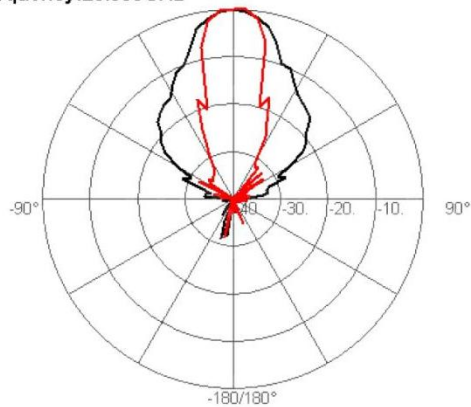


H-Plane — 3dB Beamwidth(deg):17.43
E-Plane — 3dB Beamwidth(deg):22.49

Frequency:28.000GHz

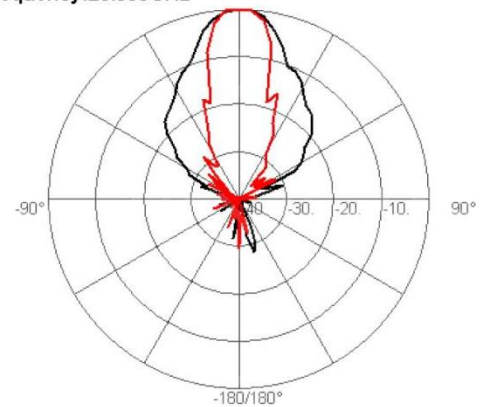

H-Plane — 3dB Beamwidth(deg):17.01
E-Plane — 3dB Beamwidth(deg):21.26

Frequency:30.000GHz

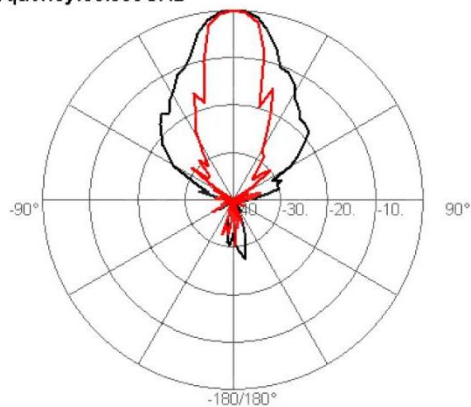

H-Plane — 3dB Beamwidth(deg):16.38
E-Plane — 3dB Beamwidth(deg):20.42