



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: CONN CONN RF 50 CO-AX N-TYPE 11 GHZ RT


Page No.

1 of 1

STK-571126791332

CONN CONN RF 50 CO-AX N-TYPE 11 GHZ RT

OUTLINE DRAWING

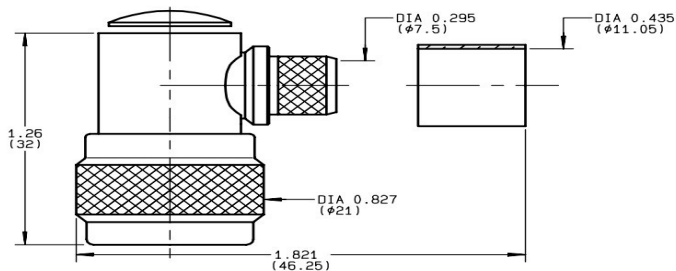

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-6Ghz
VSWR	1.70 + xF(Ghz) Maxi
Insertion loss	0.07 F(Ghz) Maxi
Voltage rating	1000 Veff Mini
Dielectric withstanding voltage	2500 Veff Mini
Insulation resistance	5000 M Ω Mini

ENVIRONMENTAL INFORMATION

Operation temperature	-55°C to +155°C
-----------------------	-----------------

MECHANICAL INFORMATION

Mating end	27 N mini
Opposite end	27 N mini
Mating life	130 Cycles mini
Weight	50.33 gr

MATERIAL INFORMATION

COMPONENTS	MATERIAL	PLATING
BODY	BRASS	SILVER 5 OVER COPPER 0.5
OUTER CONTACT	BRASS	SILVER 5 OVER COPPER 0.5
CENTER CONTACT	BRASS	GOLD 0.5 OVER NICKEL 2
INSULATOR	PTFE	-
GASKET	SILICON RUBBER	-
OTHERS PARTS	BRASS	SILVER 5 OVER COPPER 0.5

Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-

Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of **Synergy Telecom P Ltd**- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from **Defense & Aerospace division**. This document and all its copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in