



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: CON RF50 RP SMP M ST FOR PCB SOLDER LEGS


Page No.

1 of 1

STK-571127611564

CON RF50 RP SMP M ST FOR PCB SOLDER LEGS

OUTLINE DRAWING

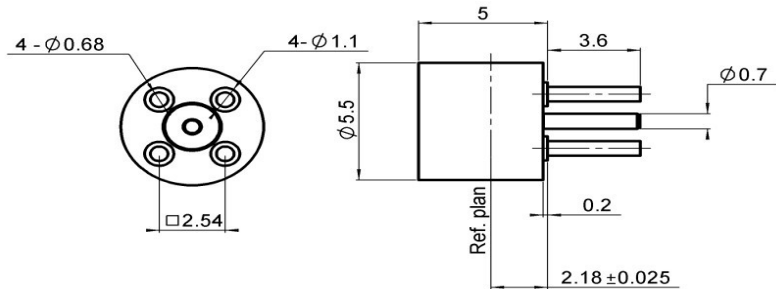

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-40* GHz
VSWR	1.15** + 0.0000 x F(GHz) Max
Insertion loss	0.12* $\sqrt{F}$ (GHz) dB Maxi
RF leakage	- (NA - F(GHz)) dB Maxi
Voltage rating	335 Veff Maxi
Dielectric withstanding voltage	500 Veff mini
Insulation resistance	5000 M Ω mini

ENVIRONMENTAL INFORMATION

Operation temperature	-65/+165 °C
-----------------------	-------------

MECHANICAL INFORMATION

Mating End	6.8 N mini
Mating life	100 Cycles mini
Weight	0,7200 g

MATERIAL INFORMATION

COMPONENTS		MATERIAL		PLATING			
BODY		STAINLESS STEEL		GOLD 0.5 OVER NICKEL 2			
Center Contact		BERYLLIUM COPPER		GOLD 1.27 OVER NICKEL 1.27			
Insulator		PTFE					
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-

Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of **Synergy Telecom P Ltd**- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from **Defense & Aerospace division**. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.
www.rfconnector.in