



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: CON RF 50 AD


Page No.

1 of 1

STK-571622531269

CON RF 50 AD

OUTLINE DRAWING

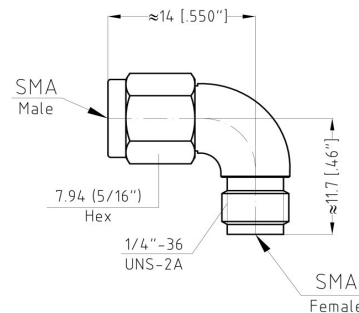

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	DC-25.0 GHz
Insertion loss	20 dB max. 18 GHz
RF leakage	-(90- fGHz)} dB
Dielectric withstanding voltage	1,500 Volts rms min
Insulation resistance	5,000 megaohms

ENVIRONMENTAL INFORMATION

Operation temperature	NA
-----------------------	----

MECHANICAL INFORMATION

Mating End	*18 N mini
Opposite end	*18 N mini
Mating life	500 Cycles mini
Weight	35,6900 g

MATERIAL INFORMATION

COMPONENTS		MATERIAL		PLATING			
BODY		BERYLLIUM COPPER		STAINLESS STEEL			
CENTER CONTACT		COPPER BERYLLIUM		GOLD, NICKEL			
INSULATOR		PTFE		-			
COUPLING NUT		SILICON RUBBER		-			
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-

Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and all its copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in