



www.rfconnector.in



Page No.


1 of 1

Nomenclature:CONN RF50 AD SMA-F TO TNC-F 4H FL MT

STK-571625691238

CONN RF50 AD SMA-F TO TNC-F 4H FL MT

OUTLINE DRAWING

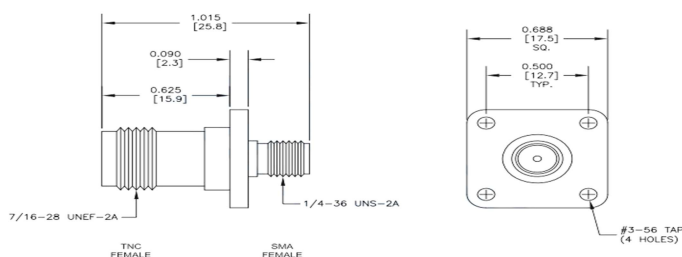

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	DC-11 GHz
Operating voltage	500 Vrms
Dielectric	1000 Vrms
Insulation resistance	5000 Mohms

ENVIRONMENTAL INFORMATION

Operation temperature	-65 to 165 c
-----------------------	--------------

MECHANICAL INFORMATION

Mating End	*18 N mini
Opposite end	*18 N mini
Mating life	500 Cycles mini
Weight	35,6900 g

MATERIAL INFORMATION

COMPONENTS		MATERIAL		PLATING				
OUTER CONDUCT		BRASS		NICKEL				
CONTACT				GOLD				
Insulation resistance		PTFE		-				
Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	01.12.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	
								Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand www.rfconnector.in