




www.rfconnector.in



Page No.
1 of 1

ADAPTOR N FEMALE-SMA FEMALE

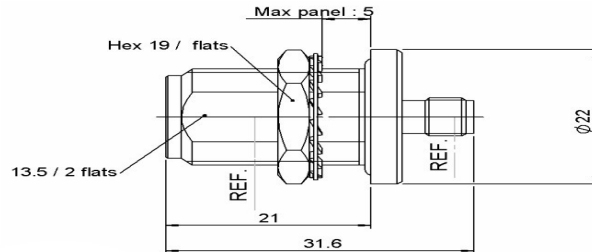

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-11 GHz
VSWR	1.20 + 0,0000 x F(GHz) Maxi
Insertion loss	TBD $\sqrt{F}$ (GHz) dB Maxi
RF leakage	- (101 - F(GHz)) dB Maxi
Voltage rating	500 Veff Maxi
Dielectric withstanding voltage	1000 Veff mini
Insulation resistance	5000 MΩ mini

Operation temperature	-55°C to +155°C
-----------------------	-----------------

MECHANICAL INFORMATION

Mating end	27 N mini
Opposite end	27 N mini
Panel nut	500 N.cm
Mating life	500 Cycles mini
Weight	40,0000 g

MATERIAL INFORMATION

COMPONENTS		MATERIAL		PLATING				 Synergy Telecom Pvt Ltd Defence & Aerospace Division
BODY		BRASS		NICKEL				
CENTER CONTACT		BERYLLIUM COPPER		GOLD				
INSULATOR		PTFE		-				
GASKET		SILICONE RUBBER		-				
OTHERS PARTS		BRASS		NICKEL				
Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	01.12.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	
								Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.