



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: CON RF50AD SMA-F/F RP ST JMT



Page No.

1 of 1

STK-571683161216

CON RF50AD SMA-F/F RP ST JMT

OUTLINE DRAWING

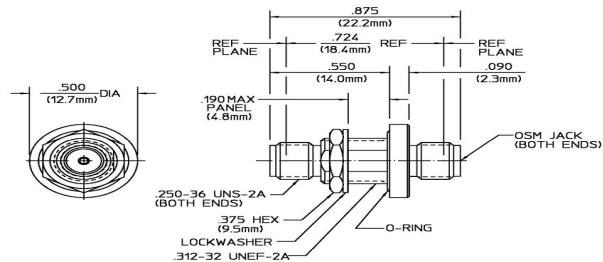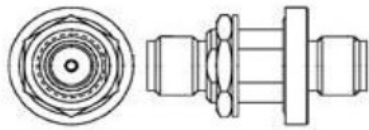

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-18 GHz
VSWR	1.10 + .010 f(GHz)
Insertion loss	.15/f(GHz)
RF leakage	-90
Dielectric withstanding voltage	1000 Veff mini
Insulation resistance	5000 M Ω mini

ENVIRONMENTAL INFORMATION

Operation temperature	-65°C to +165°C
-----------------------	-----------------

MECHANICAL INFORMATION

Torque	7 to 10 In-Lbs
Mating	3
Center Contact	6

MATERIAL INFORMATION

COMPONENTS		MATERIAL		PLATING			
BODY		STAINLESS STEEL		PASSIVATE			
DIELECTRIC		PTFE					
CENTER CONTACT		BERYLLIUM COPPER		GOLD			
CONTACT EXT		IRON, NICKEL ALLOY		-			
HERMETIC SEAL		GLASS BEAD		-			
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-



Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in