


 Technical Data	STK SERIES CONNECTOR	 www.rfconnector.in	
---	-----------------------------	---	---

Nomenclature: CONN RF50 SMP-M THRD-IN RP DC-40G	Page No. 1 of 1
--	----------------------------

STK-571128281252	CONN RF50 SMP-M THRD-IN RP DC-40G
-------------------------	--

OUTLINE DRAWING

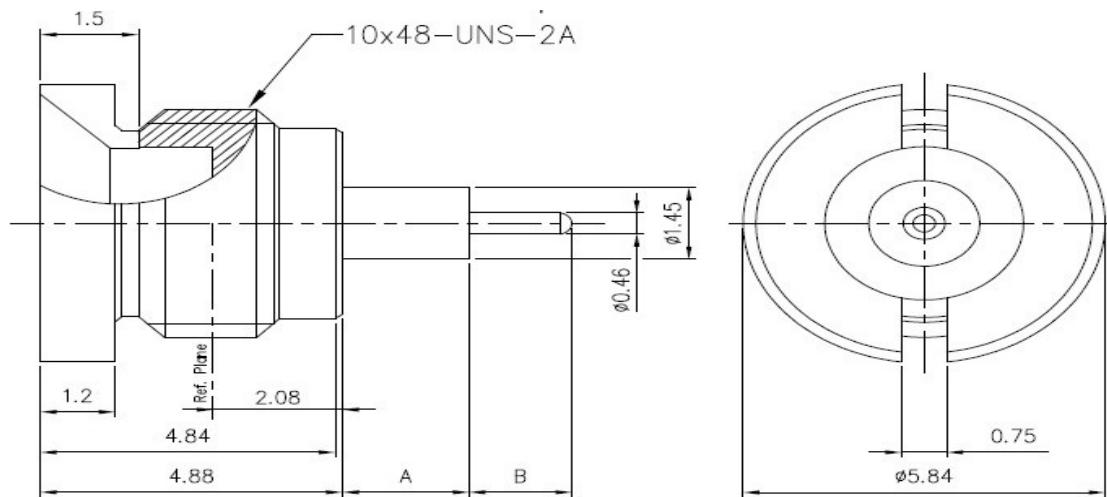

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω	
Frequency range	DC-40Ghz	
VSWR	1.05*+0.0080xf(Ghz) Max	
Insert Loss	0.1 f(Ghz) db Max	
RF leakage	-(NA-F(Ghz) db Max	
Voltage	350 v _{eff} Max	
Dielectric voltage	500 v _{eff} Max	
Insulation	5000 M Ω Min	

ENVIRONMENTAL INFORMATION

Temperature range				-65°C to +165°C				
Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	01.11.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd, WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	
				-	-	-	-	Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.


www.rfconnector.in

 Technical Data	STK SERIES CONNECTOR	 www.rfconnector.in	
---	-----------------------------	---	---

Nomenclature: CONN RF50 SMP-M THRD-IN RP DC-40G	Page No. 1 of 1
--	----------------------------

STK-571128281252	CONN RF50 SMP-M THRD-IN RP DC-40G
-------------------------	--

OUTLINE DRAWING

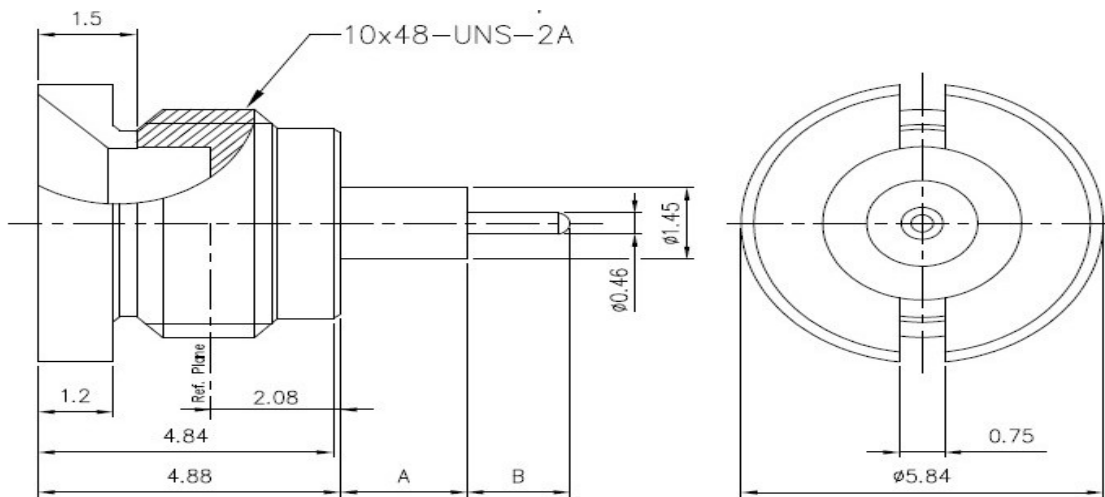

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω	
Frequency range	DC-40Ghz	
VSWR	1.05*+0.0080xf(Ghz) Max	
Insert Loss	0.1 f(Ghz) db Max	
RF leakage	-(NA-F(Ghz) db Max	
Voltage	350 v _{eff} Max	
Dielectric voltage	500 v _{eff} Max	
Insulation	5000 M Ω Min	

ENVIRONMENTAL INFORMATION

Temperature range				-65°C to +165°C				
Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	01.11.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd, WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	
				-	-	-	-	Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.


www.rfconnector.in

 Technical Data	STK SERIES CONNECTOR	 www.rfconnector.in	
---	-----------------------------	---	---

Nomenclature: CONN RF50 M THD RP NIK-1.3 AU-1.3	Page No. 1 of 1
--	----------------------------

STK-571128281446	CONN RF50 M THD RP NIK-1.3 AU-1.3
-------------------------	--

OUTLINE DRAWING

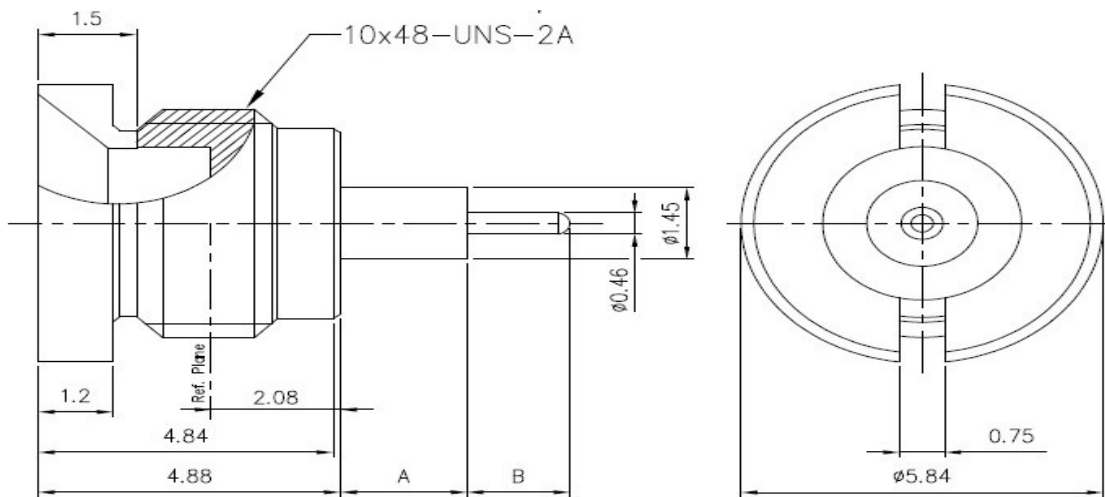

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω	
Frequency range	DC-40Ghz	
VSWR	1.05*+0.0080xf(Ghz) Max	
Insert Loss	0.1 f(Ghz) db Max	
RF leakage	-(NA-F(Ghz) db Max	
Voltage	350 v _{eff} Max	
Dielectric voltage	500 v _{eff} Max	
Insulation	5000 M Ω Min	

ENVIRONMENTAL INFORMATION

Temperature range				-65°C to +165°C				
Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	01.11.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd, WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	
				-	-	-	-	Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in