


 Technical Data	STK SERIES CONNECTOR	 www.rfconnector.in	
--	-----------------------------	---	---

Nomenclature: CONN RF50 BNC M FOR LMR-240 W/CLAMP	Page No. 1 of 1
--	---------------------------

STK-571130601298	CONN RF50 BNC M FOR LMR-240 W/CLAMP
-------------------------	--

OUTLINE DRAWING

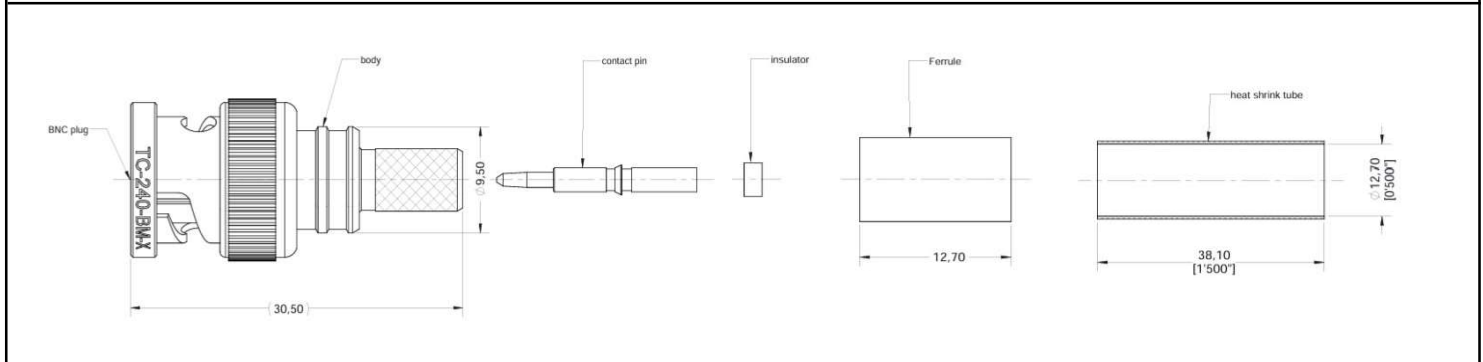

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω	
Frequency	DC to 4 GHz	
Working Voltage (V)	≥ 1000	
Insulation Resistance (M Ω)	≥ 10000	
VSWR	≤ 1.30	
Insertion Loss(dB, f/GHz)	$-0.1 \times \sqrt{f}$	

MECHANICAL INFORMATION

Center Conductor	Solder	
Outer Conductor	Crimp	
Coupling Nut Torque (N.m)	Bayonet Lock	
Cable-Connector Retention Force (N)	500	
Durability (cycles)	500	

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)	
BODY	BRASS	Albaloy	
Center Cont.	BRASS	Gold	
Ferrule	BRASS	Albaloy	
Coupling Nut	BRASS	Albaloy	
Insulator	PTFE	N/A	
Gasket	Silicone	Red	

ENVIRONMENT INFORMATION

ENVIRONMENT INFORMATION

Temperature Range	-40°C - +125°C	
Thermal Shock	MIL-STD 202G, Meth.107, Cond.B	
Vibration	MIL-STD 202G, Meth.204, Cond.B	
Shock	MIL-STD 202G, Meth.213, Cond I	

Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	01.11.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.