



P/N: SL-ST-060G180-200C 6-18GHz, 200W, Solid State Power Amplifier

ELECTRICAL SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Unit
Operating Frequency	6		18	GHz
Output Power CW	200			W
Power Gain @ P _{SAT}	54			dB
Power Gain Flatness @ P _{SAT}			±5	dB
Input VSWR			2:1	-
2 nd Harmonics @ P _{SAT}		-15	-10	dBc
Spurious Signals		-60	-55	dBc
Operating Voltage (3-Phase)		220		VAC
Power Consumption @ P _{out} =350W			4000	W
Input / Output Impedance	50			Ohm

ENVIRONMENTAL SPECIFICATIONS

Parameter	Min	Typ	Max	Unit
Operating Ambient Temp.	0		+50	°C
Storage Temp.	-20		+75	°C
Relative Humidity (non-condensing)			95	%

MECHANICAL SPECIFICATIONS

Parameter	Value
Dimensions	R6U
Weight	35kg
RF Input Connector	N-Female (rear panel)
RF Output Connector	WRD650 (rear panel)
RF Sample	N-F
Remote Control Interface	Ethernet RJ45
Cooling	Built-in Forced-air Cooling System

WZ-47, BASEMENT, BUDDHELLA VILAGE VIKAS PURI NEW DELHI - 110018

PH:- 011-28533349, MOB:- 91-7217885948, FAX:- 011-28533349

EMAIL:- INFO@SYNERGYTPL.COM, WEBSITE:- WWW.RFCONNECTOR.IN




PROTECTIONS

Input Overdrive	+10dBm Max, without Damage
VSWR Protection	At 3:1 or higher, System Shutdown
Thermal Degradation	Ambient +50

COMMUNICATIONS

Monitor (Digital Display)	Voltage, Current, P_{FWD} , P_{RVE} , Status
Control	RF On/Off

OUTLINE DRAWING

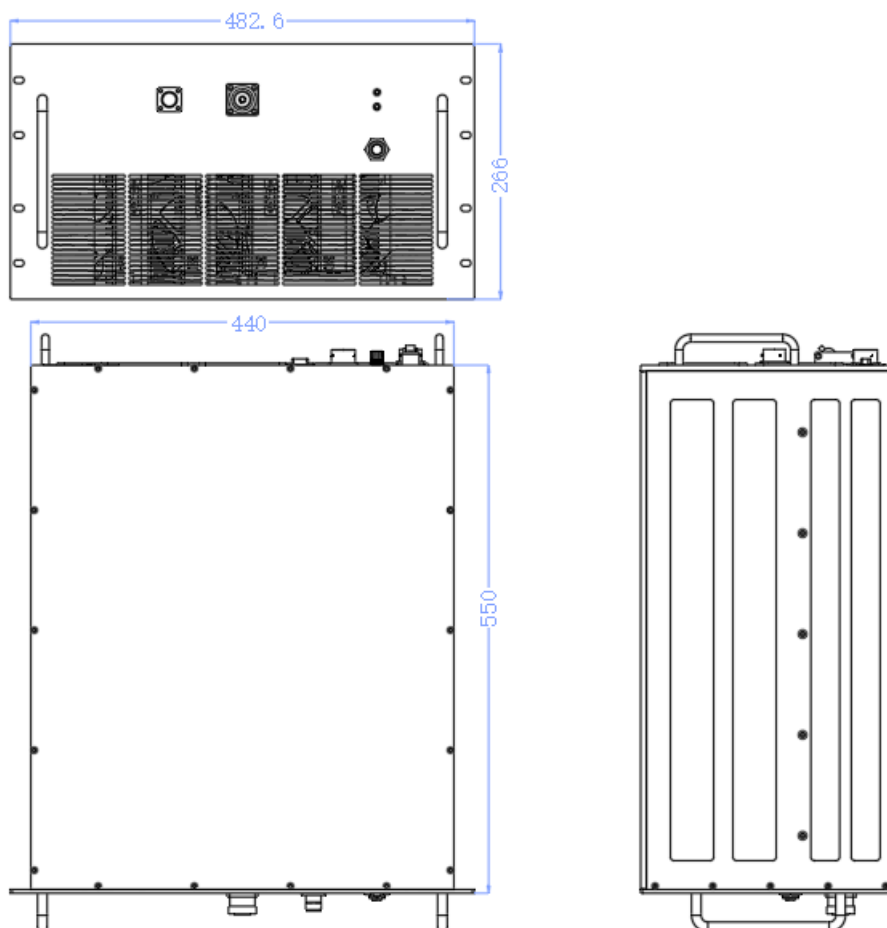

Unit: mm