



www.rfconnector.in



Nomenclature: BULKHEAD JACK


Page No.

1 of 1

STK-5711- UD-RF400-OGD-CI (B)

BULKHEAD JACK

OUTLINE DRAWING

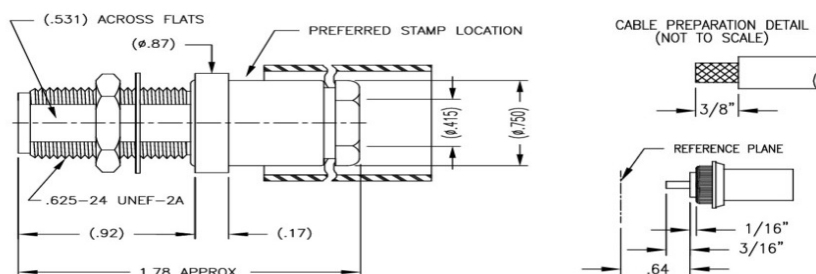

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency range	DC-11Ghz
Working voltage	2500V

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
Center contact	Brass	BeCu
RING	Brass	BUNA
Body	Brass	ALBALOY
Shrinkk sleeve	Brass	
Dielectric	PTFE	
Gasket	Brass	SI RUBBER

ENVIRONMENTAL INFORMATION

Temperature range	-65°C~+165°C
Weather standard	-

MECHANICAL INFORMATION

Torsion	-
Tensile force	-

Originated	Date	Approved	Date	Rev	Amend	Name
Sang	01.11.25	Krishnamurthy	-	0	-	-
Synergy Telecom P Ltd, WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-
				-	-	-



Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.