


Technical Data	STK SERIES CONNECTOR	
Nomenclature: CONNECTOR RF50 SMA SQFL RP 4HOLE 12.7MM		Page No. 1 of 1

STK-571127861436	CONNECTOR RF50 SMA SQFL RP 4HOLE 12.7MM
OUTLINE DRAWING	

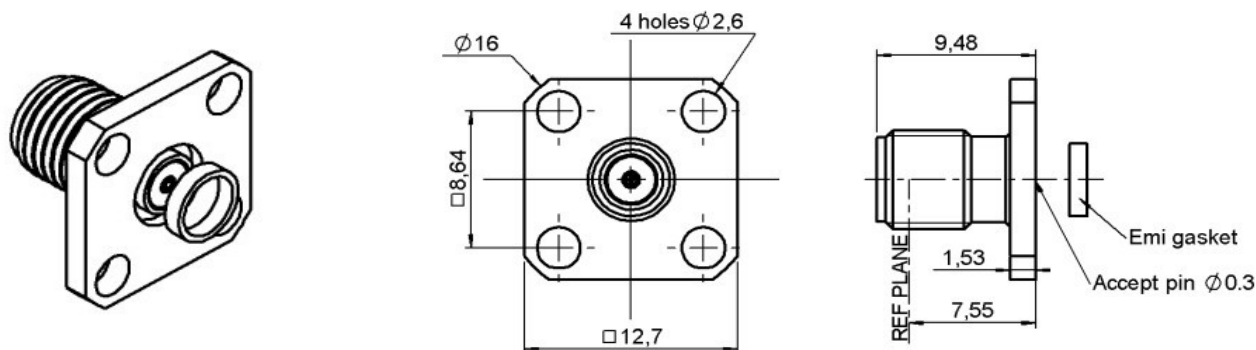

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-18 GHz
VSWR	1.04 + 0.006 x F(GHz) Maxi
Insertion loss	0.07* √F(GHz) dB Maxi
RF leakage	- (70 - F(GHz)) dB Maxi
Voltage rating	335 Veff Maxi
Dielectric withstanding voltage	1000 Veff mini
Insulation resistance	5000 MΩ mini

MECHANICAL INFORMATION

Axial force – Mating end	27 N mini
Axial force – Opposite end	27 N mini
Torque	NA N.cm mini
Mating life	500 Cycles mini
Weight	2.500 g

DIMENSIONS

COMPONENTS	MATERIALS	PLATINGS (µm)
BODY	STAINLESS STEEL	GOLD 0.5 OVER NICKEL 2
CENTER CONTACT	BERYLLIUM COPPER	GOLD 1.3 OVER NICKEL 2
OUTER CONTACT		
INSULATOR	PTFE	
GASKET	SILICONE RUBBER	

Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	27.10.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in