



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: CONN RF50 SMA ST BLK-HD JK RP Au PLT


Page No.

1 of 1

STK-571131041290

CONN RF50 SMA ST BLK-HD JK RP Au PLT

OUTLINE DRAWING

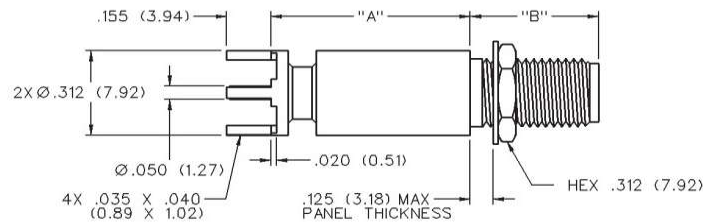

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	26.5 GHz
VSWR	1.035 + .005f
Insertion loss	0.15 f (GHz), tested at 1 GHz
RF Leakage	(dB minimum, tested at 2.5 GHz)
Insulation resistance	5000 megohms minimum

ENVIRONMENTAL INFORMATION

Operation temperature	- 65°C to + 165°C
-----------------------	-------------------

MECHANICAL INFORMATION

Durability	1500
------------	------

MATERIAL INFORMATION

COMPONENTS	MATERIAL	PLATING
BODY	BRASS	NICKEL
CONTACT	BRASS	GOLD
NUT RETENTION SPRING	BERYLLIUM	-
INSULATOR	PTFE	-
CRIMP SLEEVES	BRASS COPPER	GOLD
GASKET	SILICON RUBBER	-

Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-

Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in