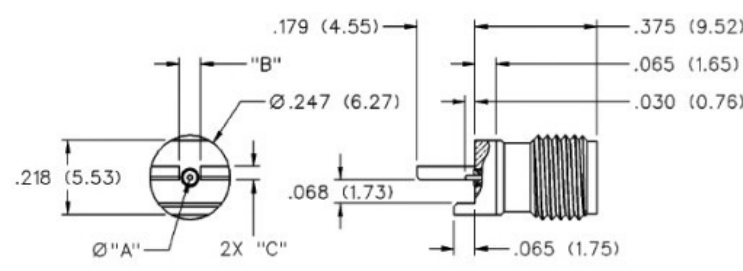


 Technical Data	STK SERIES CONNECTOR		 www.rfconnector.in				
Nomenclature:CONN RF50 SMA JK SELF FIXTURE END LAUNCH				Page No. 1 of 1			
STK-571131971229		CONN RF50 SMA JK SELF FIXTURE END LAUNCH					
OUTLINE DRAWING							
							
TECHNICAL DATA							
ELECTRICAL DATA							
Impedance		50 Ω					
Frequency		0-26.5 GHz					
VSWR		1.05+.02F(GHz) maximum 18-26.5 GHz					
Insulation resistance		1000 Megohms minimum					
ENVIRONMENTAL INFORMATION							
Operation temperature		- 65°C to + 165°C					
MECHANICAL INFORMATION							
Durability		500 Cycles minimum					
MATERIAL INFORMATION							
COMPONENTS		MATERIAL		PLATING			
BODY		BRASS		GOLD			
CONTACT		BERYLLIUM COPPER		GOLD			
DIELECTRIC		PTFE		-			
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-
 Email: sales.blr@rfconnector.in							
This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.							
www.rfconnector.in							