



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: STRAIGHT JACK


Page No.

1 of 2

STK-5711- F26-RF400-ROG-Y

STRAIGHT JACK

OUTLINE DRAWING

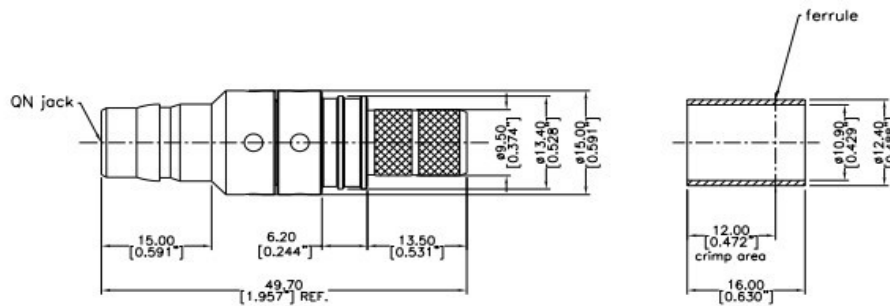

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency Range	DC to 6 GHz
Dielectric Withstanding Voltage	20000 V
Insulation Resistance	≥ 10000 M Ω
VSWR	≤ 1.30
Insertion Loss	-0.1x f(GHz) dB

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
Body	Brass	Sn-Ni
Contact Pin	Beryllium Copper	Gold
Insulator	PTFE	
Ferrule	Copper	Sn-Ni

ENVIRONMENTAL INFORMATION

Temperature range	-40°C to +125°C
Weather standard	IEC 60068 40/125/21

MECHANICAL INFORMATION

Center Cont.	Spring Finger
Outer Cont.	Crimp
Coupling Nut Torquw	N/A
Durability	100 cycles

Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	01.11.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd, WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	
Email: sales.blr@rfconnector.in								

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in