



STK SERIES CONNECTOR




Nomenclature: STRAIGHT JACK

Page No.
1 of 1

STK-5711- UD-RF400-827-GD

STRAIGHT JACK

OUTLINE DRAWING

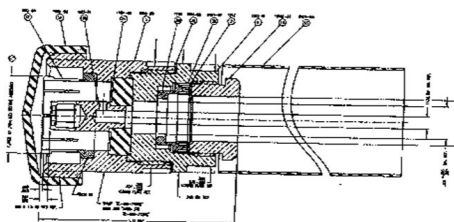

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency range	DC to 6 Ghz
VSWR	2Ghz
Insert loss	2Ghz

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
Center Contact	Beryllium copper	Silver Plated
Backnut	Brass	Silver Plated
Dielectric	Teflon	-
Attachment	Clamp	-
Other Parts	Brass	Silver Plated

ENVIRONMENTAL INFORMATION

Temperature range	-40°C~+85°C
-------------------	-------------

MECHANICAL INFORMATION

Nut torque	10-12N
Nut whorl pull	500N
Tensile force	400N
Torsion cable connector	2N

Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.11.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-



Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in