



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: STRAIGHT PLUG


Page No.

1 of 2

STK-5711- UDRF400--TN-Y

STRAIGHT PLUG

OUTLINE DRAWING

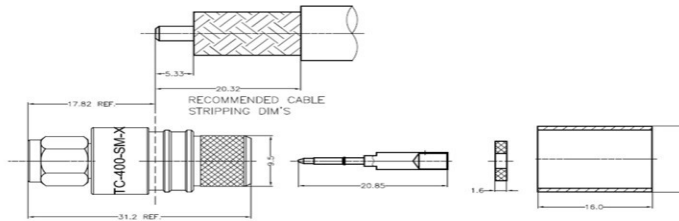

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Voltage rating	335V
Frequency range	0-6Ghz
Dielectric voltage	500V
Center contact	$\leq 3m$
Outer contact	$\leq 2m$
Insulation resistance	$\geq 5000M$
Insertion loss	N/A
VSWR	1.22Max (0-6G)

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
Body	Brass	Sn-Ni
Contact Pin	Beryllium Copper	Gold
Insulator	PTFE	
Ferrule	Copper	Sn-Ni

ENVIRONMENTAL INFORMATION

Temperature range	-55°C to +125°C
Weather standard	IEC 60068 40/125/21

MECHANICAL INFORMATION

Recommended coupling torque	7-10 in lbs
Coupling nut retention force	60 lbs Min
Durability	≥ 500 cycles

Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.11.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-

Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and all it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in