



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: RIGHT ANGLE


Page No.

1 of 2

STK-5711- UDRF400--UN-SB-E

RIGHT ANGLE

OUTLINE DRAWING

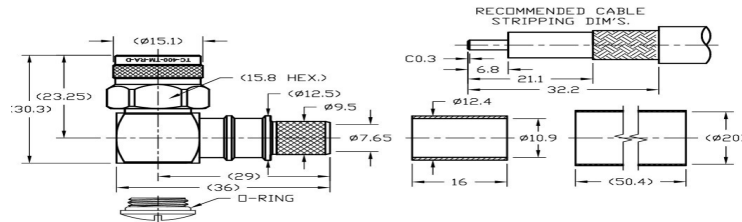

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency range	0-11Ghz
Voltage rating	500V
Dielectric voltage	500V
Center contact	$\leq 3m\Omega$
Outer contact	$\leq 2m\Omega$
Insulation loss	$> 5000M\Omega$
VSWR	≤ 1.35 Max 0-6Ghz

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
Body	Brass	Albaloy
Contact pin	Brass	Gold
Insulator	TEFLON	
Gasket	Silicon	Red
Ferrule	Brass	Albaloy
Shrink tubing	PO	Black

ENVIRONMENTAL INFORMATION

Temperature range	-55°C to +125°C
Weather standard	IEC 60068 55/155/56

MECHANICAL INFORMATION

Center Cont	6 lbs
Coupling torque	15 in-lbs Min
Durability	≥ 500 cycles

Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.11.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-



Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in