Technical Data

STK SERIES CONNECTOR


www.rfconnector.in

QUALITY PRODUCT of INDIA

Nomenclature: STRAIGHT JACK

STK-5711- UD-RF400-TG-Y	STRAIGHT JACK

OUTLINE DRAWING

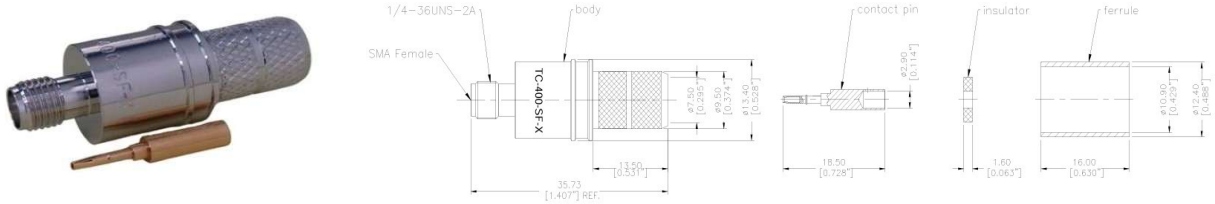

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency Range	DC to 6 GHz
Dielectric withstanding voltage	1000V
Insulation Resistance	≥5000
VSWR	≤1.30
Insertion Loss	-0.05x f(GHz) dB

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
Body	Brass	Albaloy
Center cont.	Beryllium Copper	Gold
Ferrule	Brass	Albaloy
Insulator	PTFE	

ENVIRONMENTAL INFORMATION

Temperature range	-40°C to +125°C
Weather standard	IEC 60068 55/155/56

MECHANICAL INFORMATION

Center Cont	Solder
Outer Cont	Crimp
Durability	500

Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.11.25	Krishnamurthy	-	0	-	-	-
				-	-	-	-
				-	-	-	-

Synergy Telecom P Ltd,
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India

Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand. www.rfconnector.in