



STK SERIES CONNECTOR



Nomenclature: RIGHT ANGLE


Page No.

1 of 1

STK-5711-F26-240-TN-SB-Y

RIGHT ANGLE

OUTLINE DRAWING

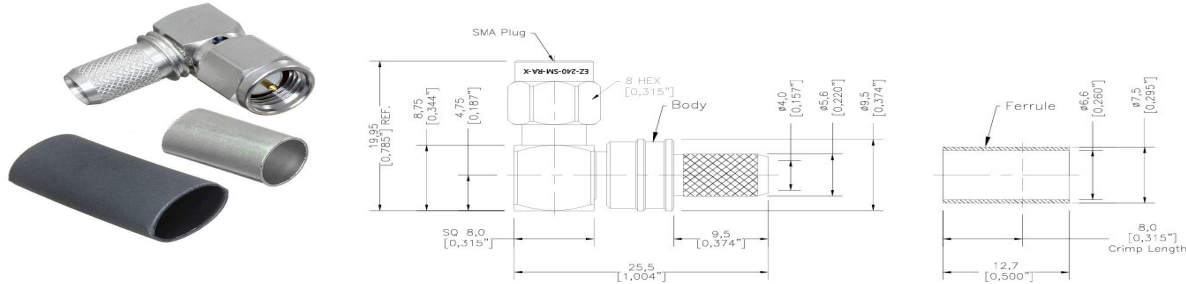

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency range	DC to 6 Ghz
Dielectric voltage	1000V
Insulation resistance	≥ 5000
VSWR	≤ 1.30

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
BODY	BRASS	ALBALOY
Center Cont	Brass + QBe2	Gold
Ferrule	Brass	ALBALOY
Nut	Brass	ALBALOY
Insulator	PTFE	-
Gasket	Silicone	-

ENVIRONMENTAL INFORMATION

Temperature range	-40°C~+125°C
Thermal Shock	MIL-STD 202G

MECHANICAL INFORMATION

Center Cont.	Spring Finger
Outer Cont	Crimp
Nut Torque	7 - 10
Connector Retention Force	60
Durability	500 Cycles

Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	01.11.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd, WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	
Email: sales.blr@rfconnector.in								

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and all it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in