



STK SERIES CONNECTOR



Nomenclature: STRAIGHT PLUG


Page No.

1 of 1

STK-5711-UD-240-827N-SB-E

RIGHT ANGLE

OUTLINE DRAWING

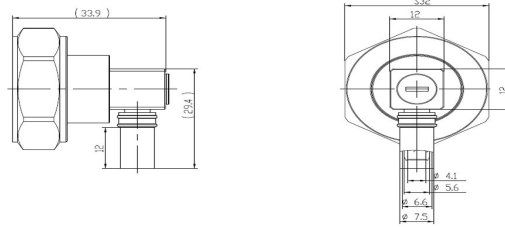

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency range	DC to 3 Ghz
Proof voltage	1500
Insert loss	≤ 0.1
Outer conductor	≤ 0.2
Inner conduct	≤ 0.8
Insulation resistance	≥ 10000
VSWR	≤ 1.15

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
Inner conduct	Brass	Ag5
Outer conductor	Brass	Copper
Nut	Brass	Copper
tube	copper	copper
Gasket	Silicon rubber	
Insulator	PTFE	

ENVIRONMENTAL INFORMATION

Temperature range	-40°C~+85°C
-------------------	-------------

MECHANICAL INFORMATION

Nut Torque	25N
Whore pull	1000N
Tensile force	310N
Torsion connector	0.2N

Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.11.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-



Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and all its copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in