



STK SERIES CONNECTOR



Nomenclature: RIGHT ANGLE


Page No.

1 of 1

STK-5711-UD-240-UN-SB-E

RIGHT ANGLE

OUTLINE DRAWING

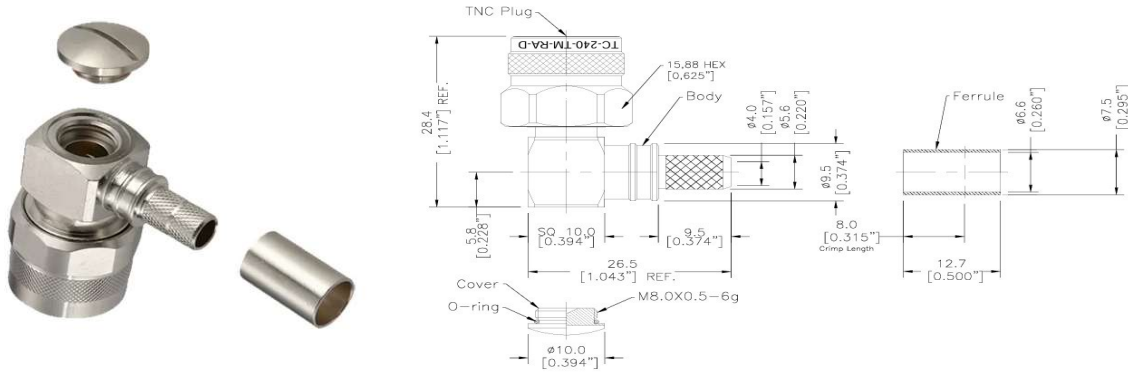

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency range	DC to 6 Ghz
VRMS	≤ 1.35
Dielectric Withstanding	1000V
Insulation Resistance	≥ 5000

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
BODY	BRASS	ALBALOY
CENTER CONT.	BRASS	GOLD
FERRULE	BRASS	ALBALOY
GASKET	SILICONE	
NUT	BRASS	ALBALOY
INSULATOR	PTFE	

ENVIRONMENTAL INFORMATION

Temperature range	-40*c-125*C
Thermal Shock	MIL-STD 202G

Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.11.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-



Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in