



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: CONN RF50 SMA PL M ST CAPT FL RG316 PASS


Page No.

1 of 1

STK-571114111298

CONN RF50 SMA PL M ST CAPT FL RG316 PASS

OUTLINE DRAWING

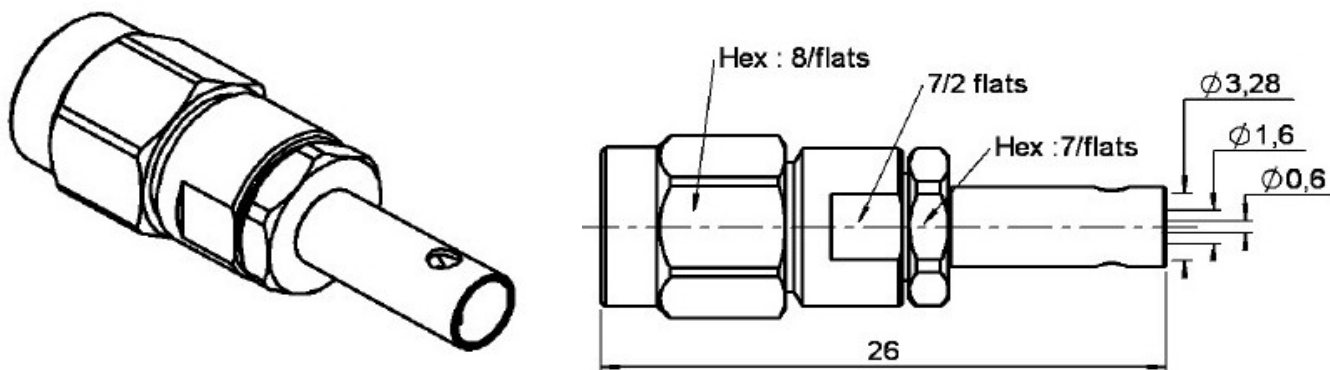

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-12.4 GHz
VSWR	1.15 + 0.020 x F(GHz) Maxi
Insertion loss	0.06 $\sqrt{F}$ (GHz) dB Maxi
RF leakage	- (60 - F(GHz)) dB Maxi
Voltage rating	250 Veff Maxi
Dielectric with standing voltage	750 Veff mini
Insulation resistance	5000 M Ω mini

MECHANICAL INFORMATION

Axial force – Mating end	27 N mini
Axial force – Opposite end	27 N mini
Torque	NA N.cm mini
Mating	NA N.cm
Panel nut	100 N.cm
Mating life	500 Cycles mini
Weight	4.700 g

ENVIRONMENTAL

Operating temperature	-65/+165 ° C							
Hermetic seal	NA Atm.cm3/s							
Panel leakage	NA							
DIMENSIONS								
COMPONENTS	MATERIALS	PLATINGS (mm)	 Synergy Telecom Pvt Ltd Defence & Aerospace Division					
BODY	STAINLESS STEEL	PASSIVATED						
CENTER CONTACT	BRASS	GOLD 1.3 OVER NICKEL 2						
OUTER CONTACT	-	-						
INSULATOR	PTFE	-						
GASKET	SILICONE RUBBER							
OTHERS PARTS	STAINLESS STEEL	PASSIVATED						
Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	01.11.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd, WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	
				-	-	-	-	Email: sales.blr@rfconnector.in
This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division . This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.								
www.rfconnector.in								