



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature:CONNECTOR CO-AXIAL


Page No.

1 of 1

STK-571123451234

CONNECTOR CO-AXIAL

OUTLINE DRAWING

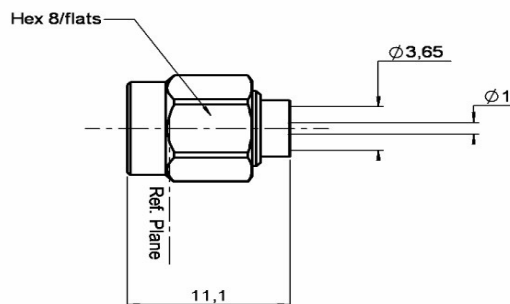

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-27 GHz
VSWR	$1.05 + 0.0080 \times F(\text{GHz})$ Maxi
Insertion loss	$0.03 \sqrt{F(\text{GHz})}$ dB Maxi
RF leakage	$-(90 - F(\text{GHz}))$ dB Maxi
Voltage rating	500 Veff Maxi
Dielectric withstanding voltage	1000 Veff mini
Insulation resistance	5000 M Ω mini

ENVIRONMENTAL INFORMATION

Operation temperature	-65/+105 ° C
-----------------------	--------------

MECHANICAL INFORMATION

Mating	100 N mini
Mating life	500 Cycles mini
Weight	2,2260 g

MATERIAL INFORMATION

COMPONENTS		MATERIALS			PLATINGS (mm)		
BODY		INOX			GOLD 0.5 OVER NICKEL 2		
CENTER CONTACT		BRASS			GOLD 1.3 OVER NICKEL 2		
OUTER CONTACT		-			-		
INSULATOR		PTFE					
GASKET		SILICONE RUBBER					
OTHERS PARTS		INOX			PASSIVATED		
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.01.26	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-

Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in