



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: CONN RF ST BLK HD


Page No.

1 of 1

STK-571124141292

CONN RF ST BLK HD

OUTLINE DRAWING

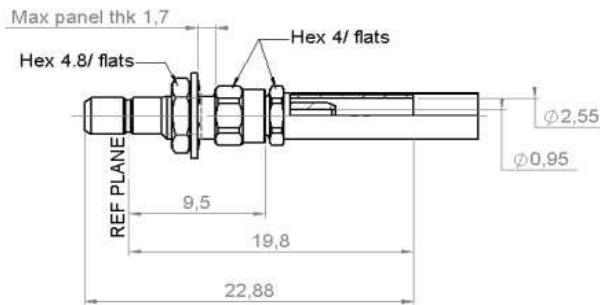

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	DC - 12.4 GHz
VSWR	1.20 + 0.02F (GHz)
Insertion loss	0.3 $\sqrt{F}$ (GHz)
RF leakage	< -55 dB at 1 GHz
Insulation resistance	5m Ω max

ENVIRONMENTAL INFORMATION

Operation temperature	65°C ~ 165°C
Vibration	Condition D (20g)
Shock	75g-6ms 1/2 sinus
Corrosion	Condition B (48h)

MECHANICAL INFORMATION

Cable Retention Force	50N - RG316: 100N
Mating Endurance	500
Center Contact	≥ 8 N

MATERIAL INFORMATION

COMPONENTS		MATERIALS			PLATINGS (mm)		
BODY		BRASS			GOLD		
CENTER CONTACT		BERYLLIUM COPPER			GOLD		
INSULATOR		PTFE			-		
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-



Email: sales.blr@rfconnector.in

This document is the property of **Synergy Telecom P Ltd**- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from **Defense & Aerospace division**. This document and all its copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in