


Technical Data	STK SERIES CONNECTOR	
----------------	----------------------	---

Nomenclature: CONN RF50 SMA JACK RP 2H FL-MT	Page No. 1 of 1
--	--------------------

STK-571127861242	CONN RF50 SMA JACK RP 2H FL-MT
OUTLINE DRAWING	

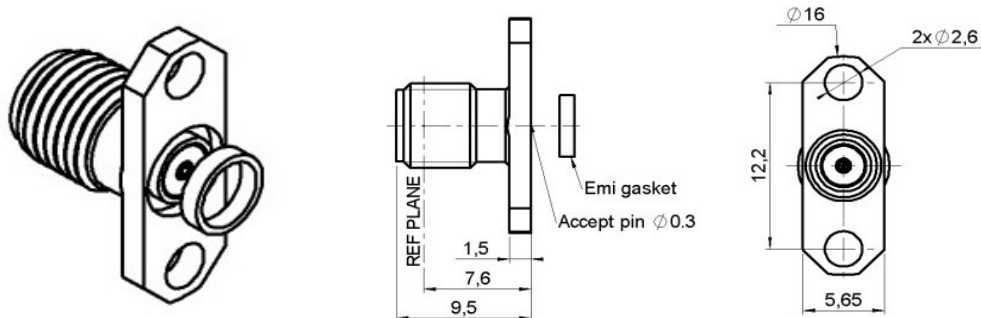

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-18 GHz
VSWR	$1.06 * + 0.002 * F(\text{GHz})$ Maxi
Insertion loss	$0.07 * \sqrt{F(\text{GHz})}$ dB Maxi
RF leakage	- 60 - F(GHz)) dB Maxi
Voltage rating	500 Veff Maxi
Dielectric withstanding	1000 Veff mini
Insulation resistance	5000 M Ω mini

MECHANICAL INFORMATION

Axial force – Mating end	27 N mini
Axial force – Opposite end	27 N mini
Torque	2.8 N.cm mini
Mating life	500 Cycles mini
Weight	1.600 g

DIMENSION

Horizontal radiation pattern	omnidirectional
Uncircularity	± 1 dB (typ.)
Connector	N female
MTBF	> 150 000 h
Operating temperature range	-40 °C to +70 °C
Dimensions ($\varnothing \times H$)	approx. 500 mm $\times$ 1400 mm
Weight	approx. 15 kg (33.1 lb)

Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division Email: sales.blr@rfconnector.in
Sang	27.10.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd, WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in